
DEPLOYTECH: Deployment Technology Survey

Web Publication Version

How to Use This Index

The information in this survey provides a sample of details on deployable structures that have been proposed, tested, and flown from the 1960s to today.

You can navigate the index by clicking on the gray buttons in the index navigation table.

When viewing the study slides, simply scroll through them as you would a normal PowerPoint Presentation. Click the "Return to Index" button to return to the navigation table.

Scroll to the first Index page to begin navigating the spacecraft summaries when you are ready.

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Material Type	Deployment Method	Year of Most Recent Demo	Issues	References	Comments
CENTRIFUGAL										
Znamya 2										

Click on the Buttons in the body of the table to view a specific subject for a specific study

Click on the "Next" to proceed to the next page

Next

Index

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Material Type	Deployment Method	Year of Most Recent Demo	Issues	References	Comments
CENTRIFUGAL										
Znamya 2										
Znamya 2.5										
IKAROS										
SOLAR SAIL BOOMS										
Coilable Boom I										
Coilable Boom II										
Coilable Boom III										
Superstring										

Next

Index

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Material Type	Deployment Method	Year of Most Recent Demo	Issues	References	Comments
STIFF TECHNOLOGIES										
Bonded Boom										
FlatFoldedTube										
RolaTube										
STEM										
TRAC										
TubeMast										

Next

Index

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Material Type	Deployment Method	Year of Most Recent Demo	Issues	References	Comments
INFLATABLES										
ECHO 1										
ECHO 2										
ITSAT										
Pathfinder Impact Attenuation System										
Champollion Solar Array										
OCS										
Cibola Experiment										
IAE										
L'Garde Ground Demonstration										

Next

Index

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Material Type	Deployment Method	Year of Most Recent Demo	Issues	References	Comments
INFLATABLES – cont'd										
Transhab										
Vega 1&2 Balloon										
SAR										
ISIS										
Genesis 1										
Genesis 2										

Next


Znamya 2

[Next](#)

[Return to
Index](#)

Znamya 2

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
Znamya 2	9	n/a	20 diameter	n/a	1993

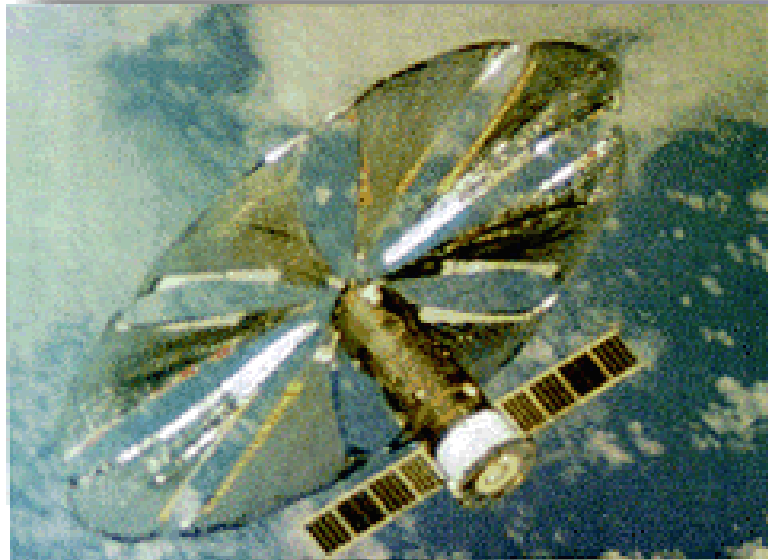



[Next](#)

[Return to
Index](#)

Znamya 2

Material Type

- Aluminized Mylar Reflector
- [Click here for flight movie](#)

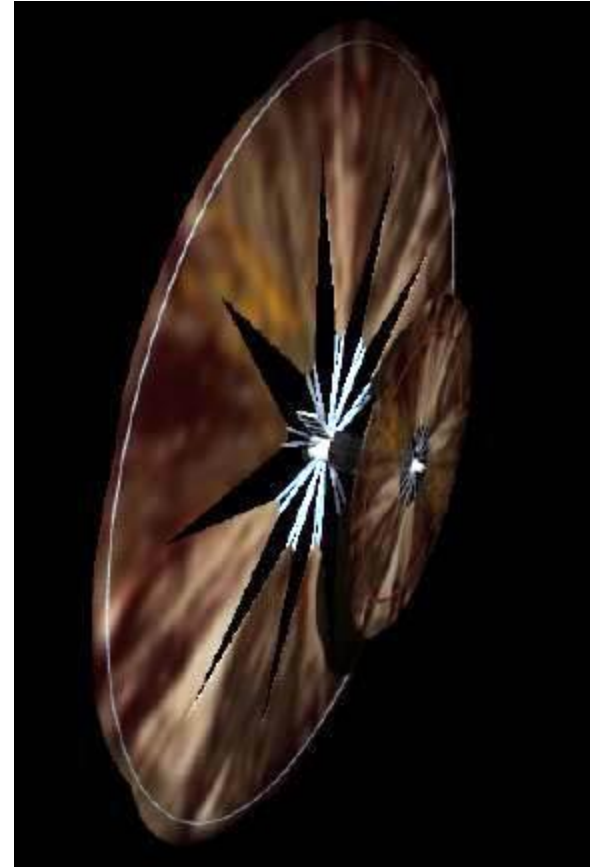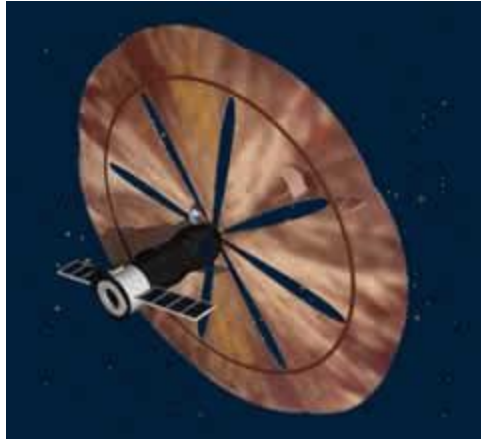


Next

Return to
Index


Znamya 2

Deployment Method

- Centrifugal Force
- [Click for deploy movie](#)

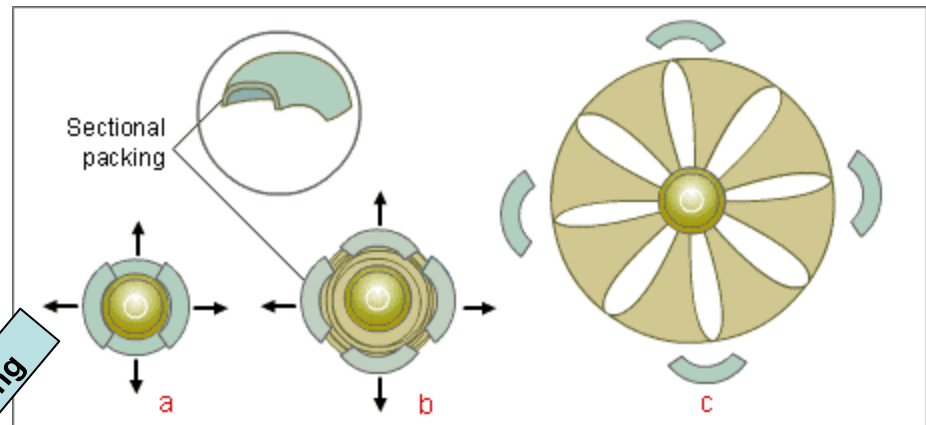

Sail packaging

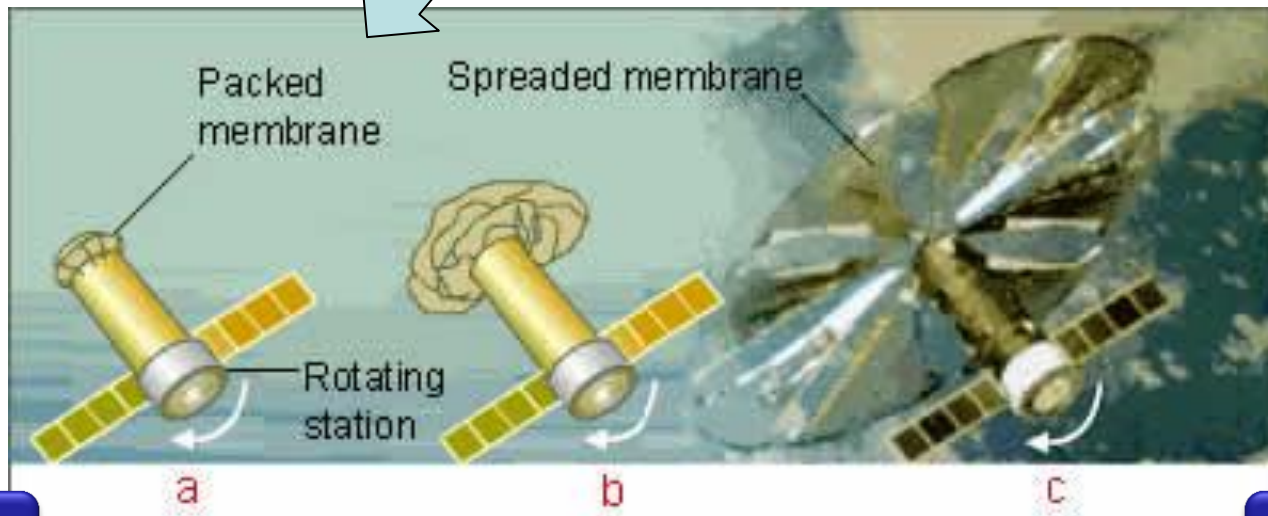


Next

Return to
Index

Znamya 2

Issues & Comments

- Znamya 2 was a successful in space demonstration of a solar reflector or “space mirror” technology concept to provide continual light to remote areas

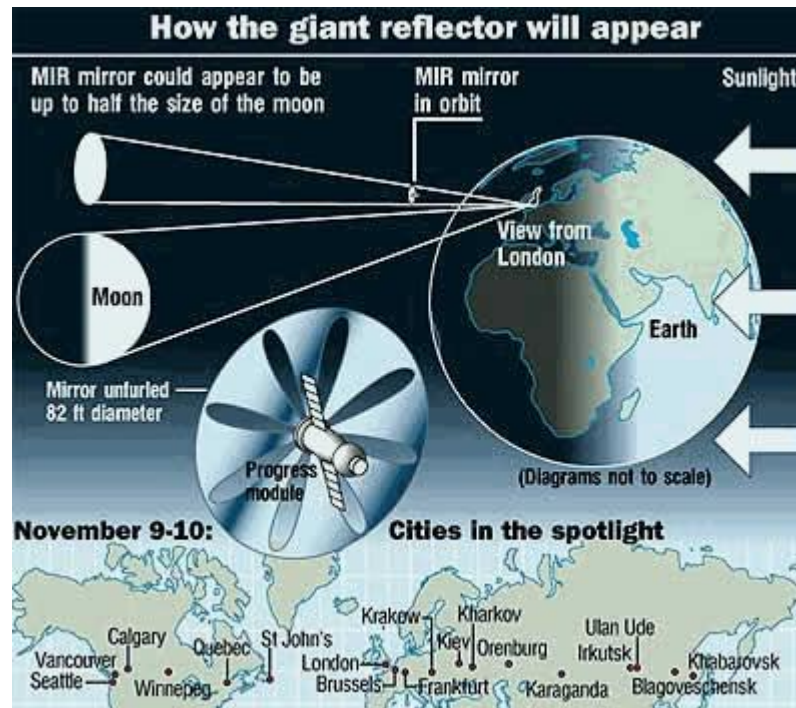

Proposed concept illustration

Next

Return to
Index


Znamya 2.5

Next

**Return to
Index**

Znamya 2.5

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent demo
Znamya 2.5	9	n/a	20 diameter	n/a	1999

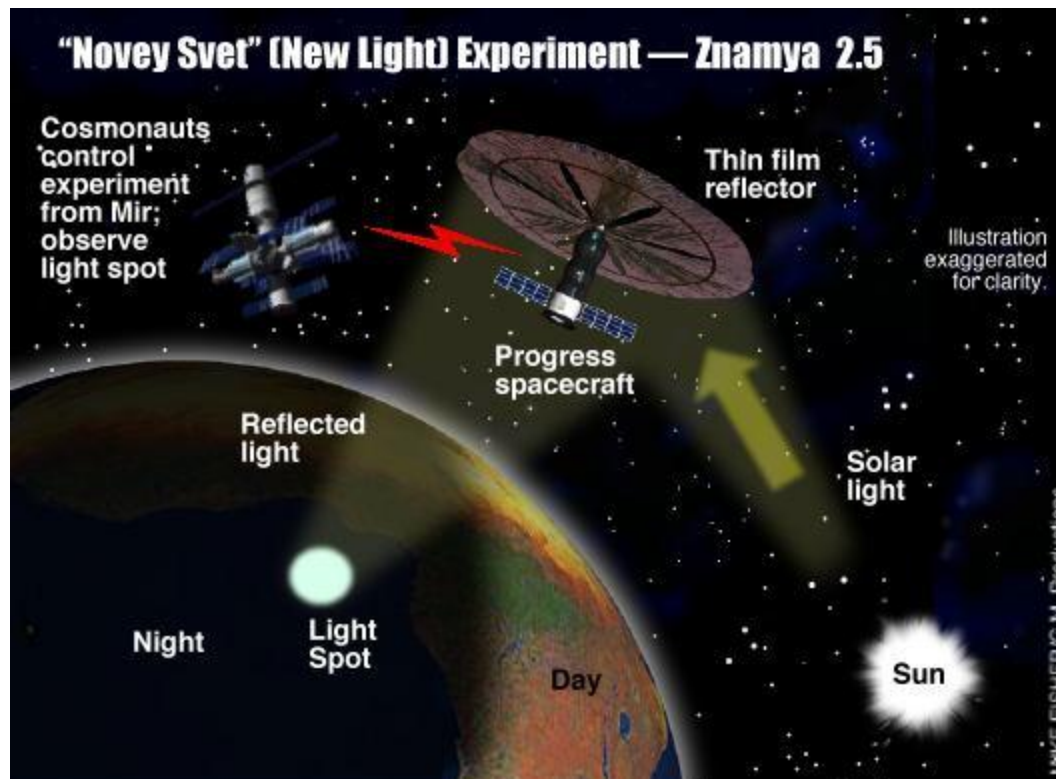



Next

Return to
Index

Znamya 2.5

Material Type

- Aluminized Mylar Reflector
- [Click here for flight movie](#)

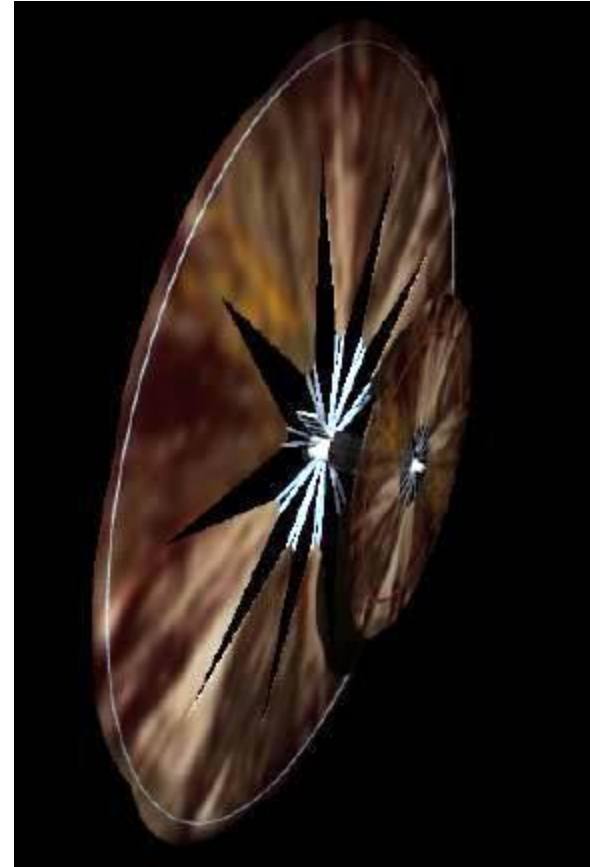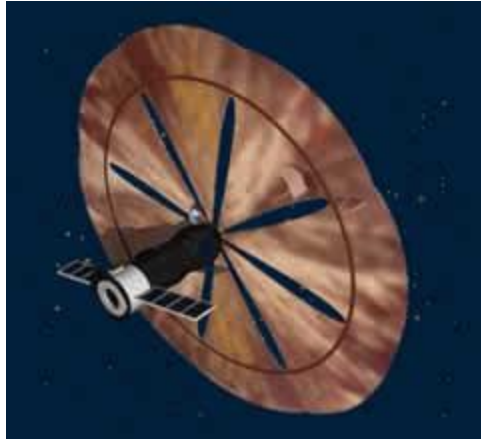


Next

Return to
Index


Znamya 2.5

Deployment Method

- Centrifugal Force
- [Click for movie](#)

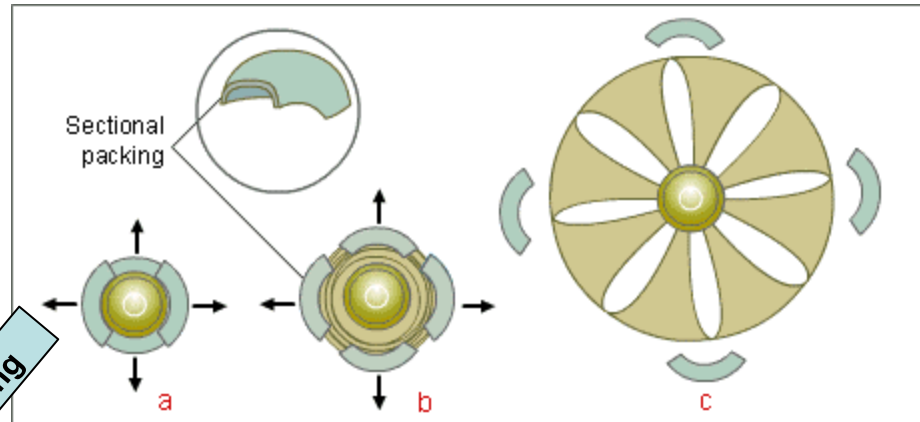

Sail packaging

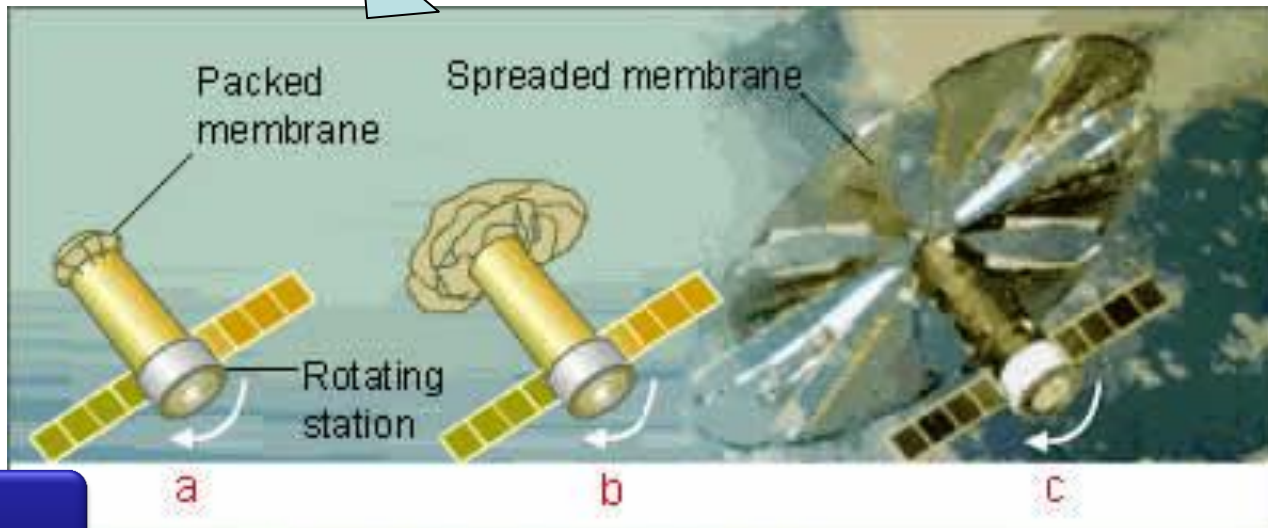


Next

Return to
Index

Znamya 2.5

Issues & Comments

- Soon after deployment, the mirror caught on MIR and ripped
- The failure of Znamya 2.5 caused the cancellation of Znamya 3 with a proposed size of 60-70m

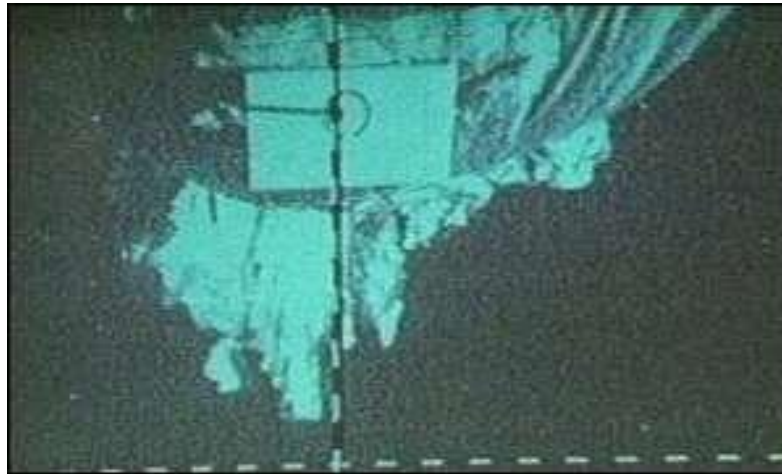

Ripped sail during in-space flight demonstration

Next

Return to
Index

Znamya 2.5

References

Shpakovsky, N., "Space Mirror," <http://www.triz-journal.com/archives/2002/06/e/index.htm>, 1997-2005.

BBC News online: <http://news.bbc.co.uk/2/hi/science/nature/272103.stm>

Next

Return to
Index

Interplanetary Kite-Craft Accelerated by Radiation of the Sun


(IKAROS)

[Next](#)

[Return to
Index](#)

IKAROS

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Date of most recent demo
IKAROS	9	310 kg	20 diagonal diagonal	n/a	2010

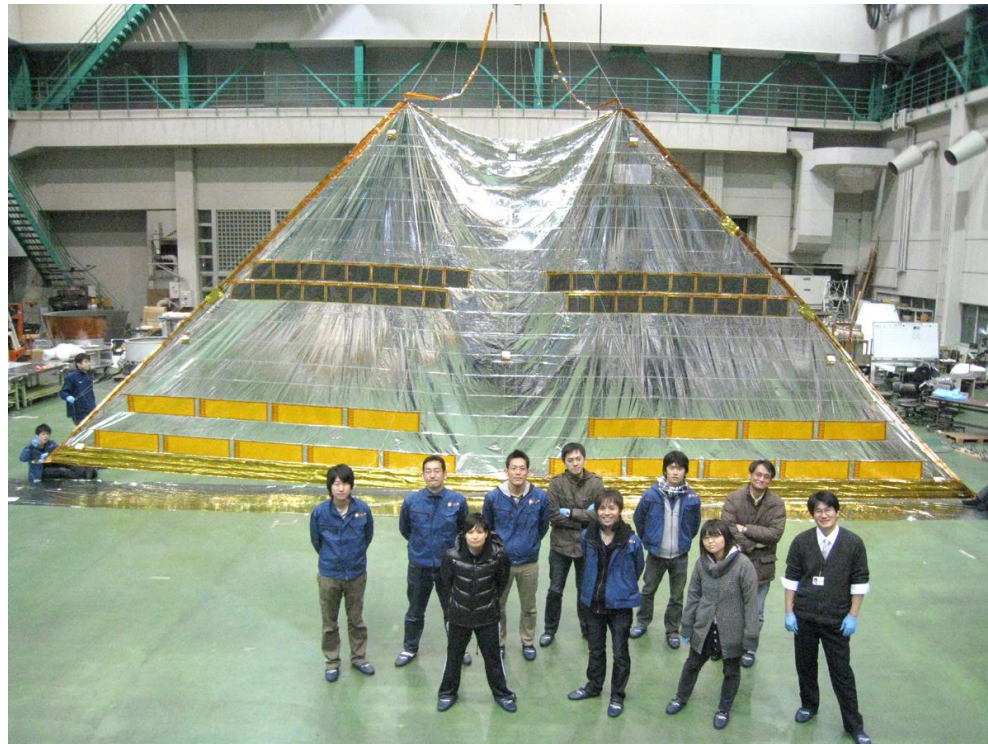

Next


[Source: JAXA]

Return to
Index

IKAROS


Material Type

- 7.5 micron thin film, polyimide
- Four trapezoid pedals configured into a box sail

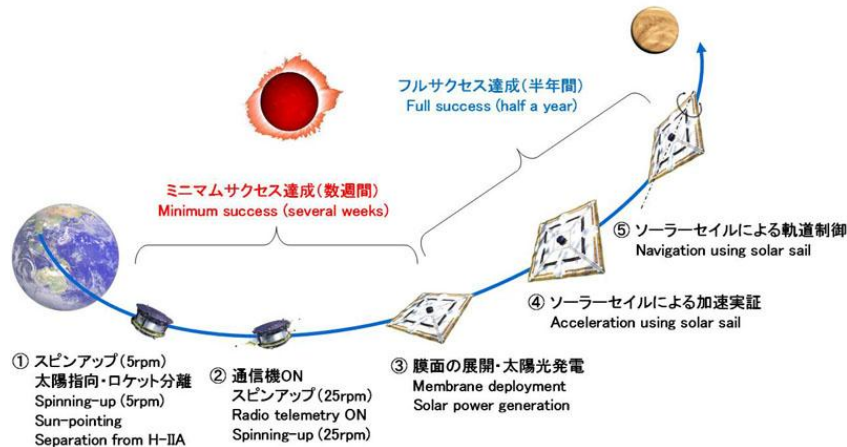

ミッションシーケンス
Mission sequence

[Source: JAXA]

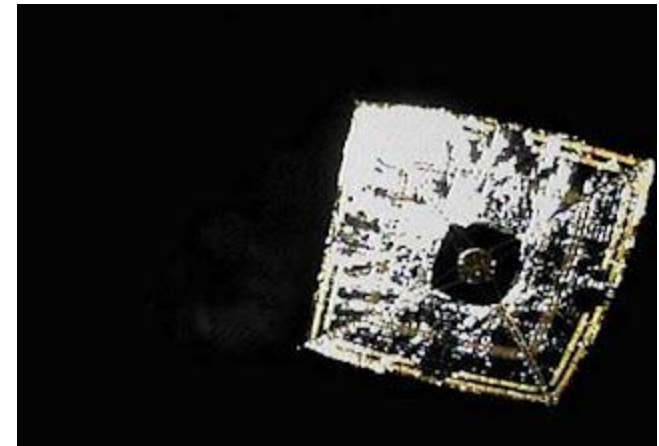

[Source: JAXA]


Next

Return to
Index

IKAROS

Deployment Method

- Centrifugal force from spinning spacecraft
 - Two stage process: Static and dynamic

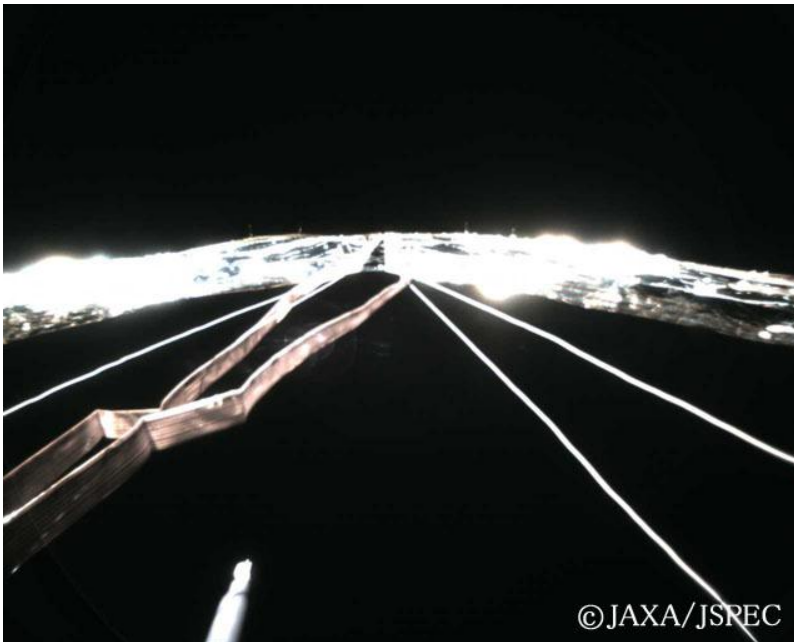

[Source: JAXA]



[Source: JAXA]

[Next](#)

[Return to Index](#)

IKAROS

Issues & Comments

- IKAROS was successfully deployed in June of 2010
- Venus fly by in December 2010
- All planned experiments and missions were completed in December 2010
- IKAROS is currently sailing through interplanetary space, allowing scientists to practice steering of the solar sail
- Due to the current angle of the sun, IKAROS is in a hibernation mode until the spring

[Next](#)

[Return to
Index](#)

IKAROS

References

Furuya, Hiroshi, et al, "Manufacturing and Folding of Solar Sail "IKAROS"", 52nd AIAA/ASME/ASCE/AHS/ASC Structures, Structural Dynamics and Materials Conference AIAA-2011-1907, April 4-7, 2011, Denver, Colorado.

JAXA websites:

http://www.jaxa.jp/projects/sat/ikaros/index_e.html

<http://www.jspec.jaxa.jp/e/activity/ikaros.html>

http://www.jaxa.jp/article/special/explore/mori01_e.html

Next

Return to
Index

COILABLE BOOM I

Various Operations

Next

**Return to
Index**

Coilable Boom I - Various

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
Coilable Boom I – Various	9	0.24	1.6 to 44.5	44.5	2010



Next

Return to
Index

Coilable Boom I - Various

Material Type

- Carbon composite
- Aluminum
- Fiberglass
- Special coating required for spaceflight



Next


Return to
Index

Coilable Boom I - Various

Deployment Method

TYPICAL DEPLOYMENT SEQUENCE

1. Power is applied to the tip/payload release actuator(s).
2. Boom self-deploys under internal strain energy. Deploy rate (typically $\sim 1\text{-}3$ in/sec) is regulated by lanyard to boom tip paid off a spool on canister-mounted rotary damper. Full stiffness is developed from root mounting as longerons rotate to their deployed angle. Boom uncoils from stack at tip end.
3. Boom is fully deployed. Boom may be retracted manually by re-coiling, or on-orbit by a lanyard-operated bridle mechanism and a motor drive.

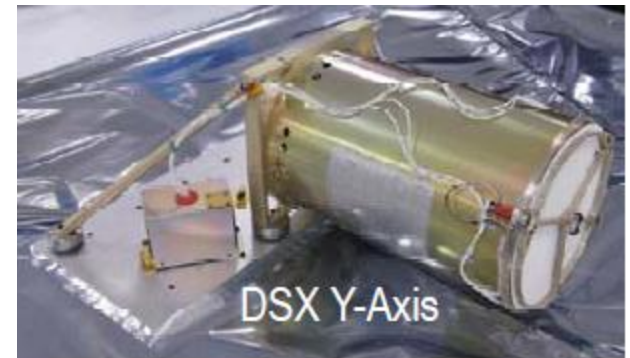

Next

Return to
Index

Coilable Boom I - Various

Issues & Comments

- Higher mass
- At least 18 have flown operationally of various sizes

Program	Customer	Launch Date	Length each (m)	Diameter (in)	EI (lb*in ²)
SAFE	Lockheed/ NASA	3-Feb-84	32	14.4	1.79E+06
Galileo	JPL	18-Oct-89	3.5	12.5	1.34E+07
Galileo	Univ. of Iowa/JPL	18-Oct-89	6.45	12.5	1.34E+07
LACE	Naval Research Laboratory	14-Feb-90	44.5	10	4.97E+06
UARS	GE Astro	15-Sep-91	4.9	12.5	1.41E+07
EUVE	Fairchild Space	7-Jun-92	1.6	17.64	5.01E+07
GGS WIND	Martin Marietta	1-Nov-94	12.4	12.5	1.34E+07
GGS POLAR	Martin Marietta	24-Feb-96	6.2	12.5	1.34E+07
Mars Pathfinder	JPL	4-Dec-96	0.8	7.2	1.79E+06
Cassini	JPL	15-Oct-97	4.8	12.5	1.75E+07
Lunar Prospector	Lockheed Martin	7-Jan-98	2.6	8	2.20E+06
EOS-AM (Terra)	Lockheed Martin	18-Dec-99	9	13.75	
MIDEX IMAGE	U. Mass Lowell	25-Mar-00	9.9	7.2	9.00E+05
GOES N	Boeing	24-May-06	8.4	10	6.39E+06
Classified	Lockheed Martin	1-Jun-03			
GOES O	Boeing	26-Jun-09	8.4	10	6.39E+06
GOES P	Boeing	4-Mar-10	8.4	10	6.39E+06
GOES R	Lockheed Martin	In Work	8.5	12.5	1.34E+07
DSX Z-Axis	AFRL	delivered	8	10	4.97E+06
DSX Y-Axis	JPL/ AFRL	delivered	40	9.5	2.40E+06
LADD	Northrop Grumman/NASA/SIDO	Delivered	8	16.67	4.45E+07
Triana	Orbital	Delivered	3.5	10	4.97E+06
Mars Polar Lander	NASA JPL	21-Jun-05	0.8	7.2	1.80E+06
ST8 SAILMAST	JPL	delivered	40	9.5	2.80E+06
MMS	LASP	delivered	12	10.24	4.56E+06

Next

Return to
Index

Coilable Boom I - Various

References

ATK/ABLE 2011 COILABLE Brochure

<http://www.atk.com/Products/documents/Coilable%202011.pdf>

Next

Return to
Index

Coilable Boom II


In Space

Next

**Return to
Index**

Coilable Boom II – In Space

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
Coilable Boom II – In Space boom	6	0.070	20	80	2005

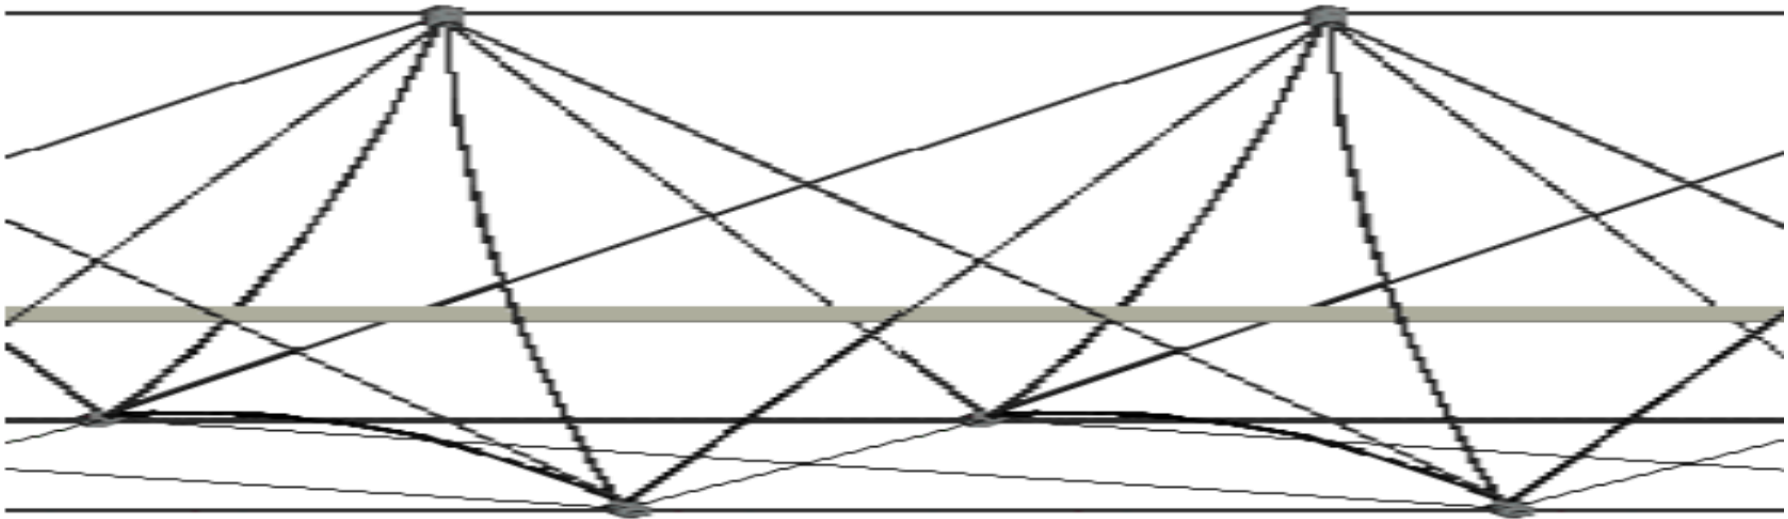

[Source: ATK]

[Next](#)

[Return to Index](#)

Coilable Boom II – In Space

Material Type

- Composite

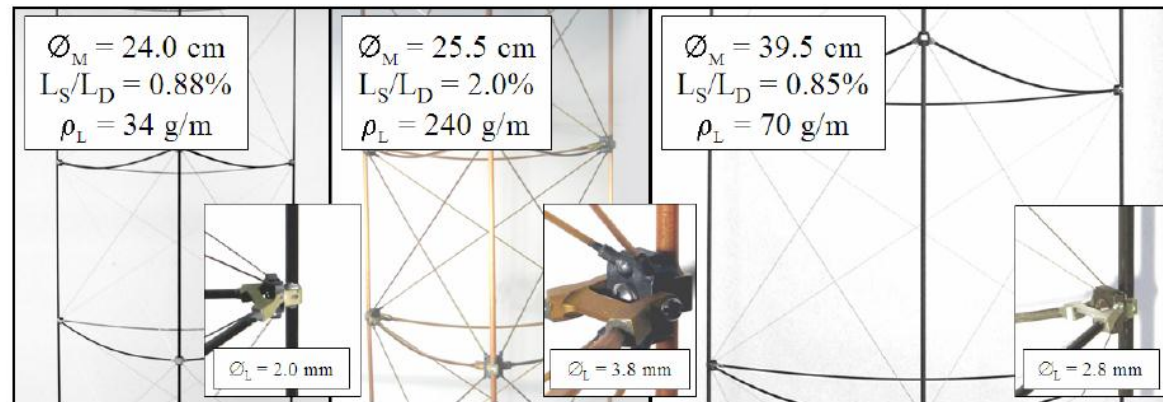


Figure 6. Comparison of a Heritage S2 Glass Boom to Gossamer Sail Masts (ST8-L, ISP-R)


Next

Return to
Index

Coilable Boom II – In Space

Deployment Method

- Lanyard spring system

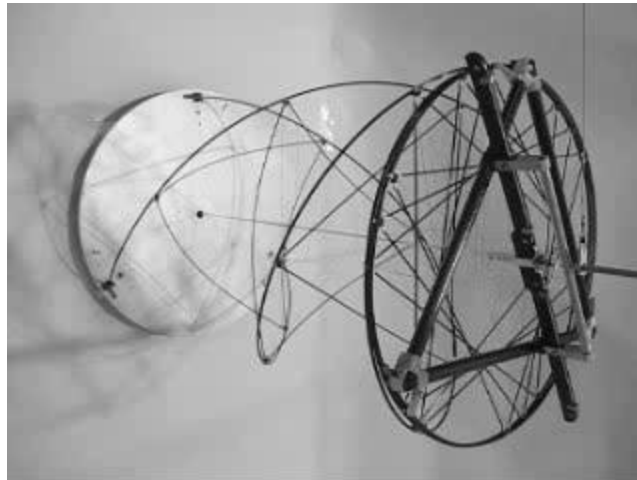


[Next](#)

[Return to
Index](#)

Coilable Boom II – In Space

Issues & Comments

- Lower TRL
- Designed for 80 meters and cut short

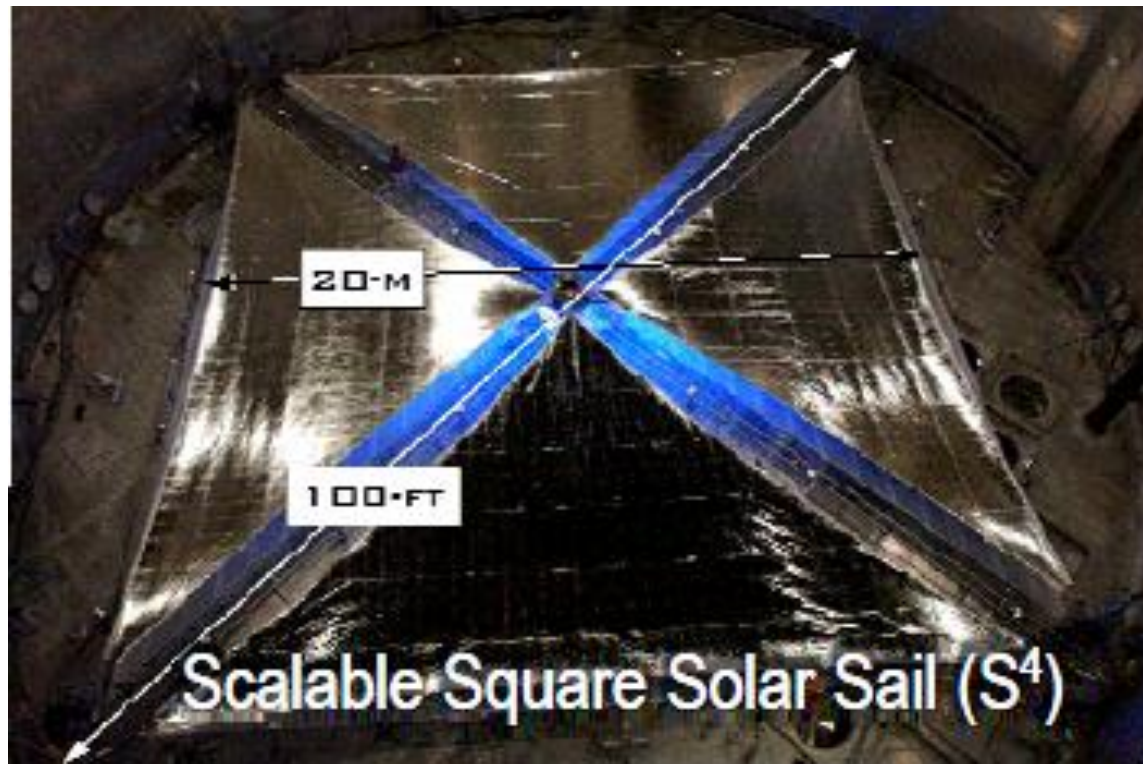

Next

Return to
Index

Coilable Boom II – In Space

References

Murphy, David, McEachen, Michael, Macy, Brian, Gaspar, James, "Demonstration of a 20-m Solar Sail System", 46th AIAA/ASME/ASCE/AHS/ASC Structures, Structural Dynamics & Materials Conference AIAA-2005-2126, April 18-21, Austin, Texas.

[Next](#)

[Return to
Index](#)

Coilable Boom III

ST8 SAILMAST

Next

**Return to
Index**

Coilable Boom III- ST8 SAILMAST

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
Coilable Boom III – ST8 SAILMAST	6	0.035	40	40	2008

Next

Return to
Index

Coilable Boom III- ST8 SAILMAST

Material Type

- Fiberglass

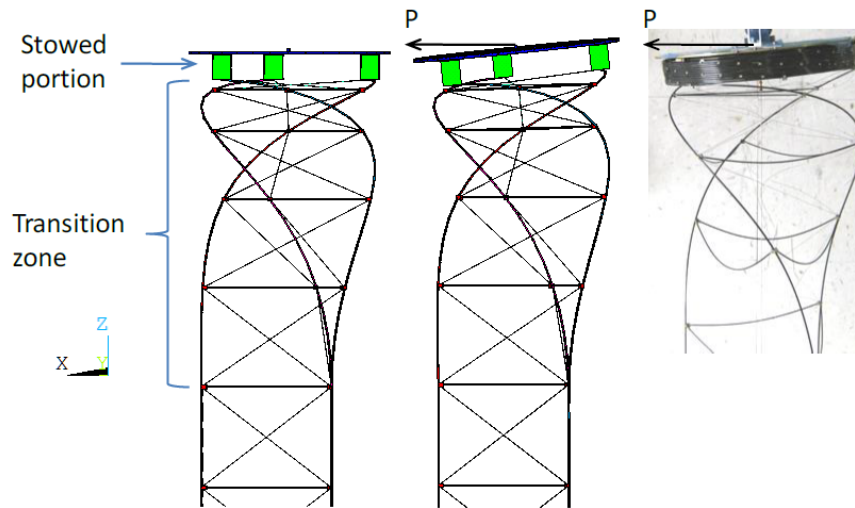


Figure 16. FEM and Test of Partially Deployed Boom


Next

Return to
Index

Coilable Boom III- ST8 SAILMAST

Deployment Method

- Lanyard spring system

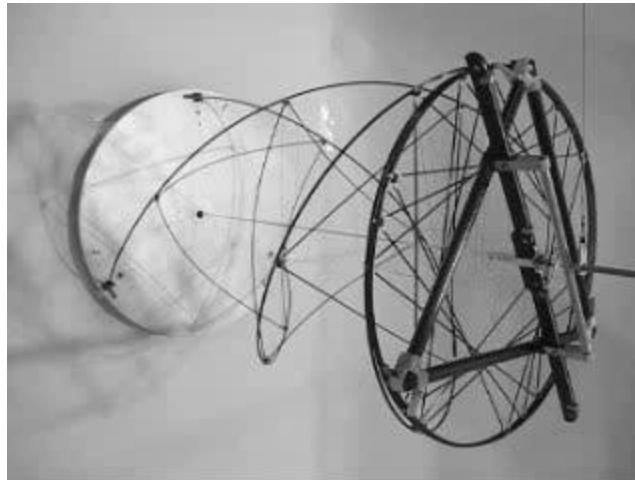

[Next](#)

[Return to
Index](#)

Coilable Boom III- ST8 SAILMAST

Issues & Comments

- Lower TRL
 - SRTM** – 1994 Shuttle Radar Topography Mission
 - SAFE** – 1984 NASA Science Mission
 - Cassini** – NASA Saturn Science Mission

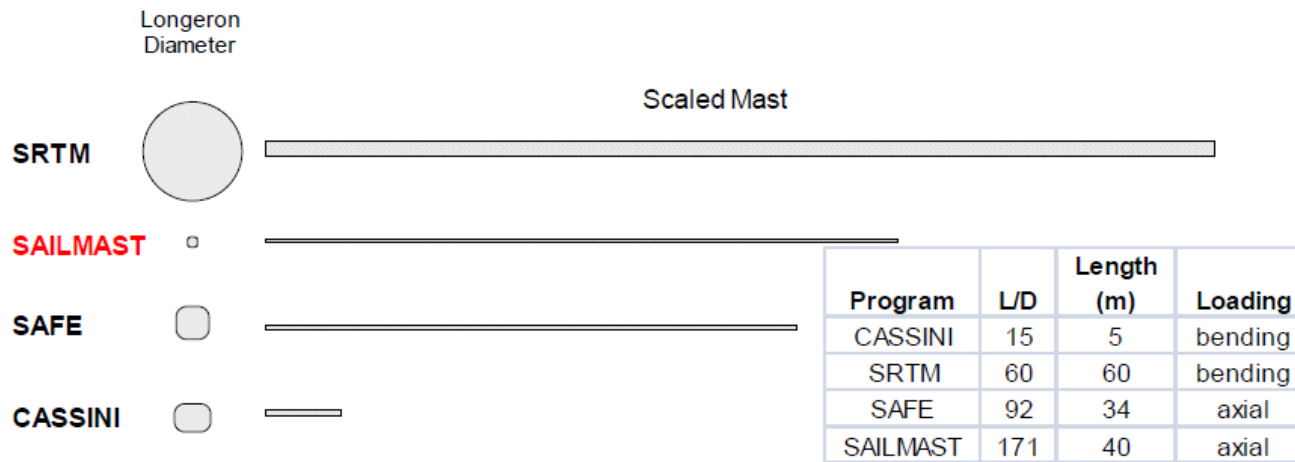


Figure 1. Mast Slenderness Comparison

Next

Return to
Index

Coilable Boom III- ST8 SAILMAST

References

McEachen, Michael E., "Validation of SAILMAST Technology and Modeling by Ground Testing of a Full-Scale Flight Article" AIAA 2010-1491, *48th AIAA Aerospace Sciences Meeting, January 4-7, 2010, Orlando, FL.*

[Next](#)

[Return to
Index](#)

Superstring

Next

Return to
Index

Superstring

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Date of most recent demo
Superstring	3	0.02 – 0.08	TBD	100	TBD

Next

Return to
Index

Superstring

Material Type

- Fiberglass

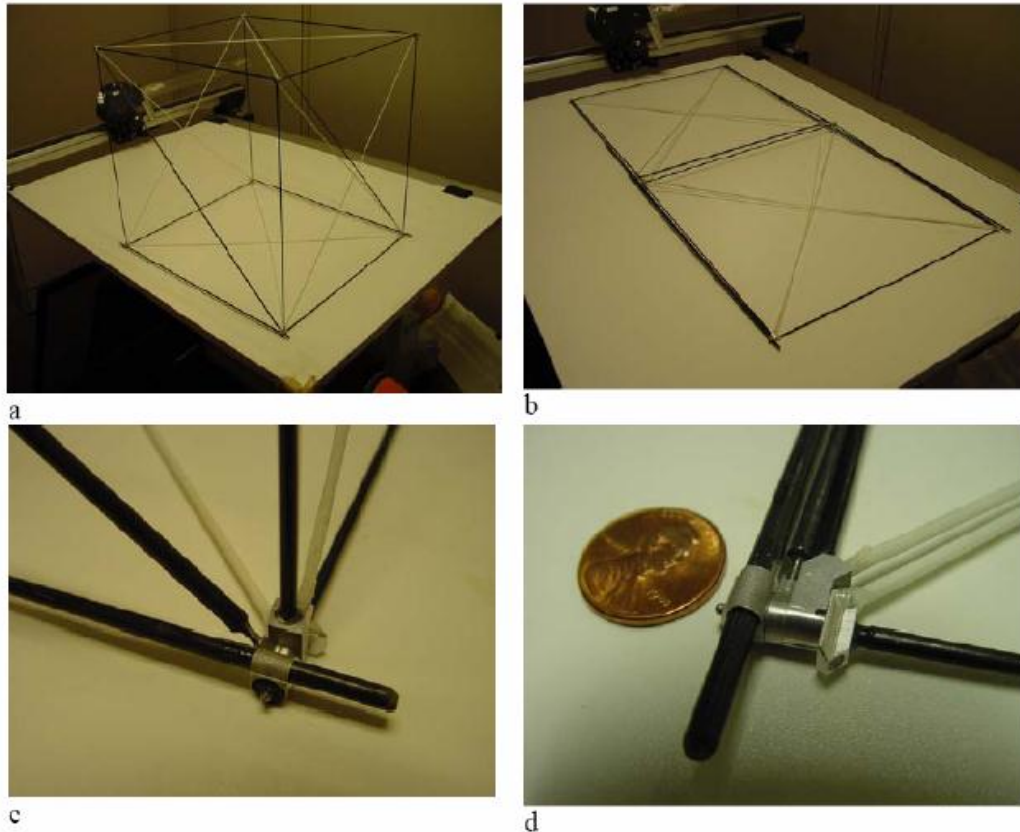


Figure 6. Photographs of Truss Boom Nodes and Assembly


Next

Return to
Index

Superstring

Deployment Method

- Rotary Drive with Longeron Clamps

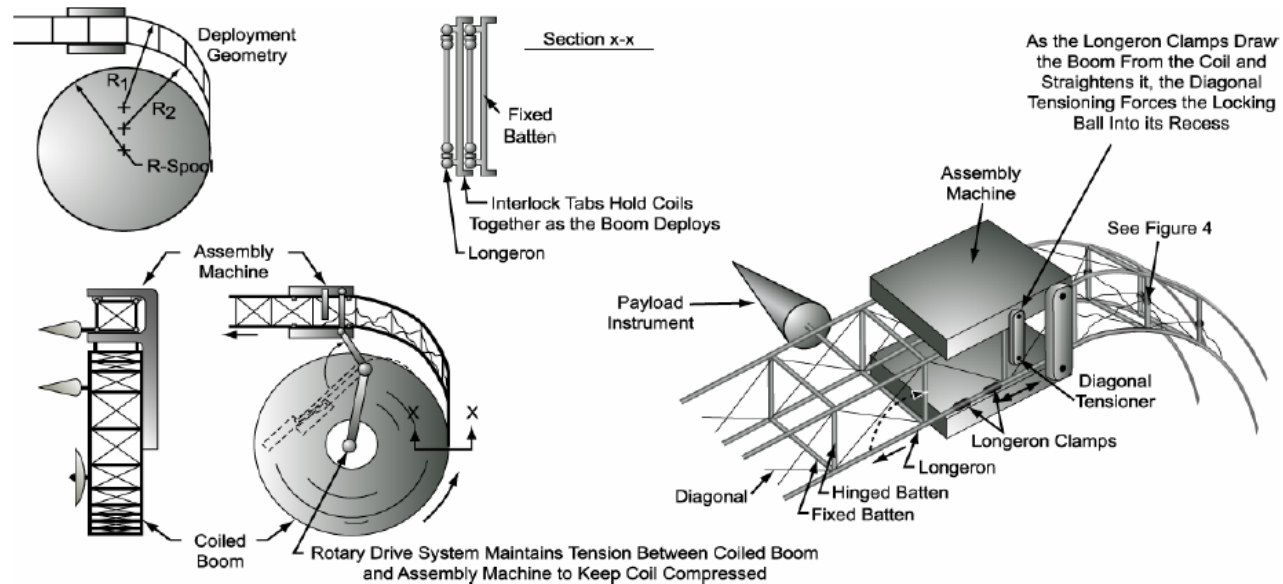


Next

Return to
Index


Superstring

Issues & Comments

- Low TRL
- Analytic with some preliminary testing
- Novelty is in the packaging

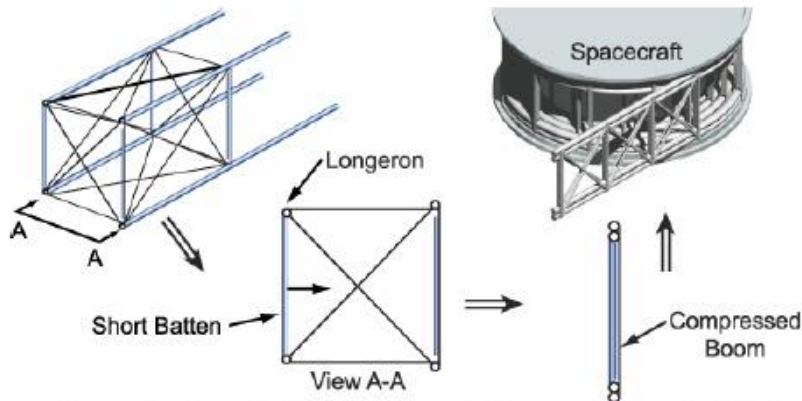

Superstring Stows By Wrapping Around a Drum or Spacecraft. It First Compresses Laterally So All Four Longons Lie in Same Plane. Boom May Then Be Wrapped Around Drum Without Strain Between Longons

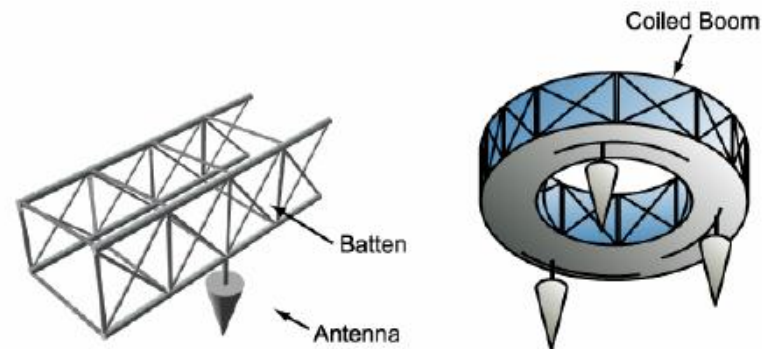

Superstring Forms a Rigid Structure to Which All Kinds of Hardware Can Be Attached and Stowed for Launch

Next

Return to
Index

Superstring

References

Brown, M., Tasker, F., Kirby, G., "A Deployable Truss Beam for Long or Lightly Loaded Space Applications, 10th Gossamer Forum, 2009.

[Next](#)

[Return to
Index](#)



Bonded Boom

Next

Return to
Index

Bonded Boom

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
Bonded Boom	5+	n/a	10	n/a	2005

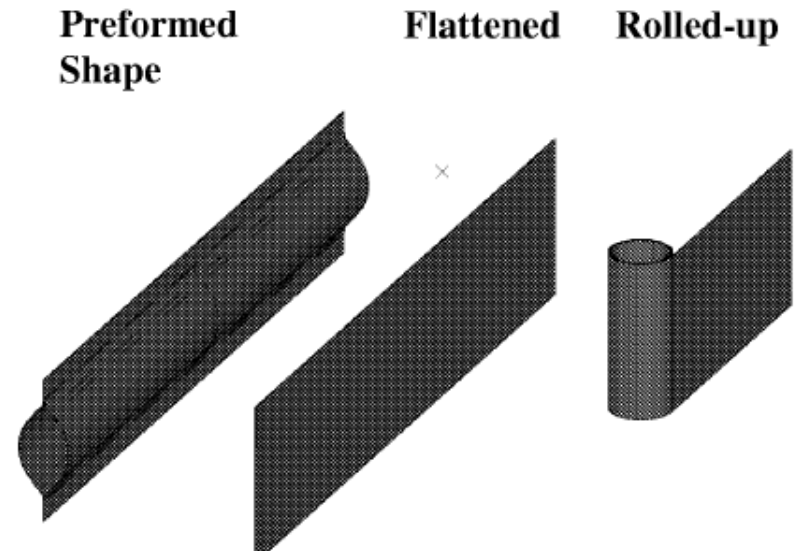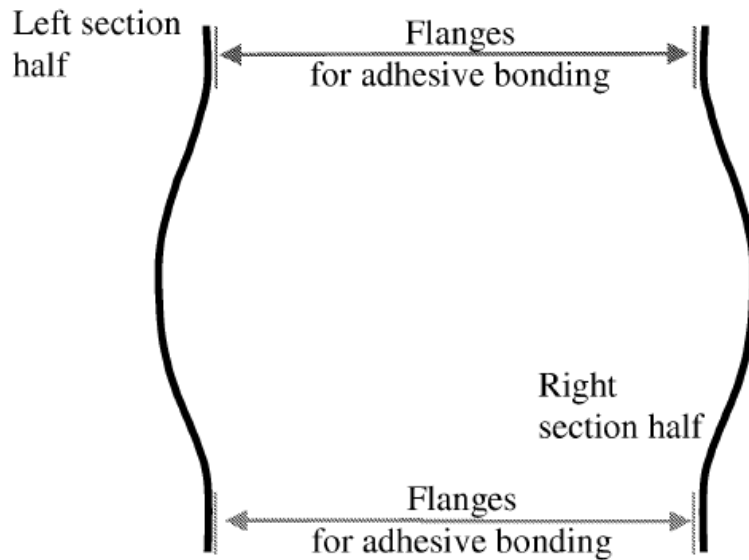

[Next](#)

[Return to Index](#)

Bonded Boom

Material Type

- Carbon Fiber Reinforced Plastic (CFRP)
- Bonded during deploy


[Next](#)

[Return to
Index](#)

Bonded Boom

Deployment Method

- Bonded in space

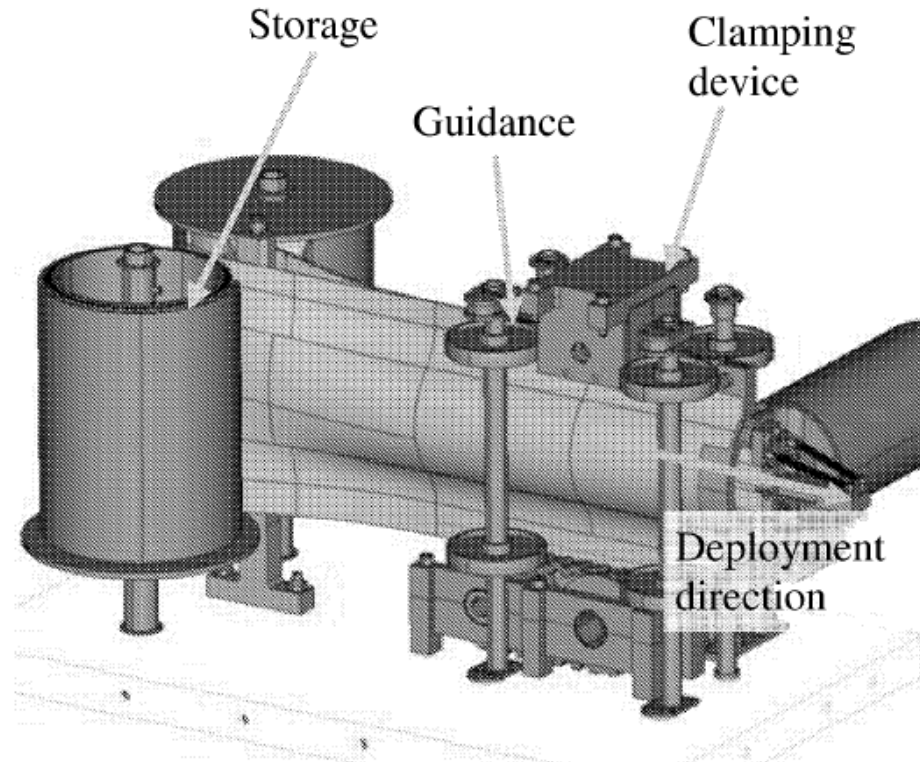

Next

Return to
Index

Bonded Boom

Issues & Comments

- Complexity of deployment methods

[Next](#)

[Return to
Index](#)

Bonded Boom

References

Title: Deployable structure for flexible solar generators

Authors: Seifart, K., Göhler, W., Schmidt, T., John, R., & Langlois, S.

Journal: Proceedings of the European Conference on Spacecraft Structures, Materials and Mechanical Testing 2005 (ESA SP-581). 10-12 May 2005, Noordwijk, The Netherlands.

Websites:

<http://adsabs.harvard.edu/full/2005ESASP.581E.104S>

Next

Return to
Index


FlatFolded Tube

[Next](#)

[Return to
Index](#)

FlatFolded Tube

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
FlatFoldedTube	9	0.1875	40	Unlimited	Mars Express Satellite

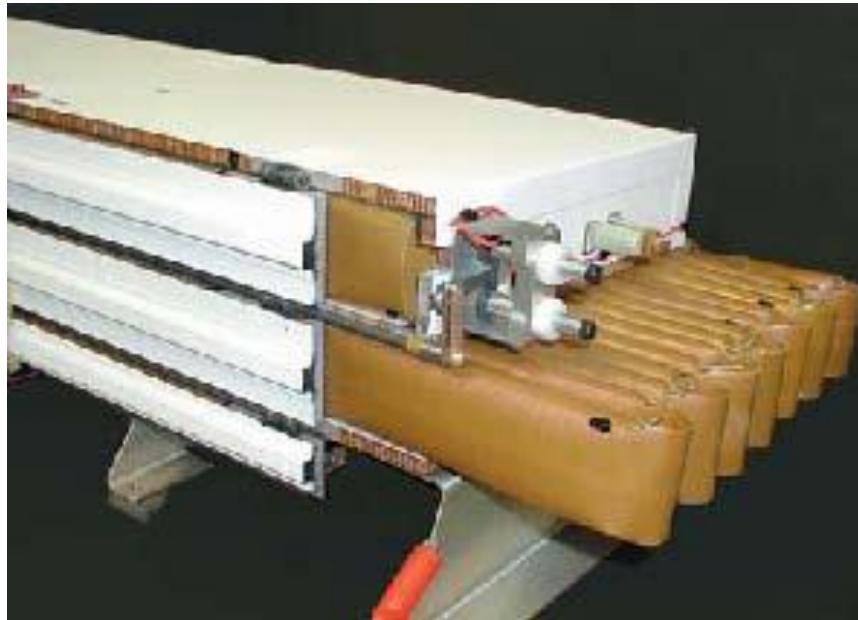

[Next](#)

[Return to
Index](#)

FlatFolded Tube

Material Type

- Fiberglass or composite



[Next](#)

[Return to
Index](#)

FlatFolded Tube

Deployment Method

- Unfolding

[Next](#)

[Return to
Index](#)

FlatFolded Tube

Issues & Comments

- Packaging for unfolding
- Clearance for unfolding sections

[Next](#)

[Return to
Index](#)

FlatFolded Tube

References

Websites: Northrop Grumman (Astro Aerospace)

http://www.as.northropgrumman.com/products/aa_fftube/assets/DS-412-FlatFoldTube.pdf

Next

Return to
Index

RolaTube

[Next](#)

[Return to
Index](#)

RolaTube

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
RolaTube	5	n/a	n/a	n/a	In Production



[Next](#)

[Return to Index](#)

RolaTube

Material Type

- Composite



[Next](#)

[Return to
Index](#)

RolaTube

Deployment Method

- Reeled out
- [Click here for movie](#)



Next

Return to
Index

RolaTube

References

Title: Deployable structure for flexible solar generators

Authors: Seifart, K., Göhler, W., Schmidt, T., John, R., & Langlois, S.

Journal: Proceedings of the European Conference on Spacecraft Structures, Materials and Mechanical Testing 2005 (ESA SP-581). 10-12 May 2005, Noordwijk, The Netherlands.

Websites:

<http://www.rolatube.com/>

[http://www.rolatube.com/sites/default/files/Rolatube Web Site Pres.pp](http://www.rolatube.com/sites/default/files/Rolatube_Web_Site_Pres.pp)

Video Demonstration:

<http://www.youtube.com/watch?v=BNfxvdRWTkQ>

Next

Return to
Index

STEM

[Next](#)

[Return to
Index](#)

STEM

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
STEM	9	0.143	6.7	unlimited	In Production

**150-LB LINEAR
ACTUATOR STEM™**



[Next](#)

[Return to
Index](#)

Material Type

- Stainless steel

Next

Return to
Index

Deployment Method

- Reeled out

Next

Return to
Index

Issues & Comments

- Mass efficiency

[Next](#)

[Return to
Index](#)

STEM

References

Northrop Grumman (Astro Aerospace)

Websites:

http://www.as.northropgrumman.com/products/aa_stem/index.html

http://www.as.northropgrumman.com/products/aa_stem/assets/DS-415-150lbBI-STEM.pdf

http://www.as.northropgrumman.com/products/aa_stem/assets/DS-414-40lbBI-STEM.pdf

http://www.as.northropgrumman.com/products/aa_stem/assets/DS-101-BiStemActuator.pdf

Next

Return to
Index

Triangular Rollable And Collapsible (TRAC)


**Air Force Research Laboratory (AFRL)
NeXolve, Division of Mantech Inc. (Licensee)**

Next

**Return to
Index**

TRAC

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
TRAC	8	n/a	2.2	n/a	2010

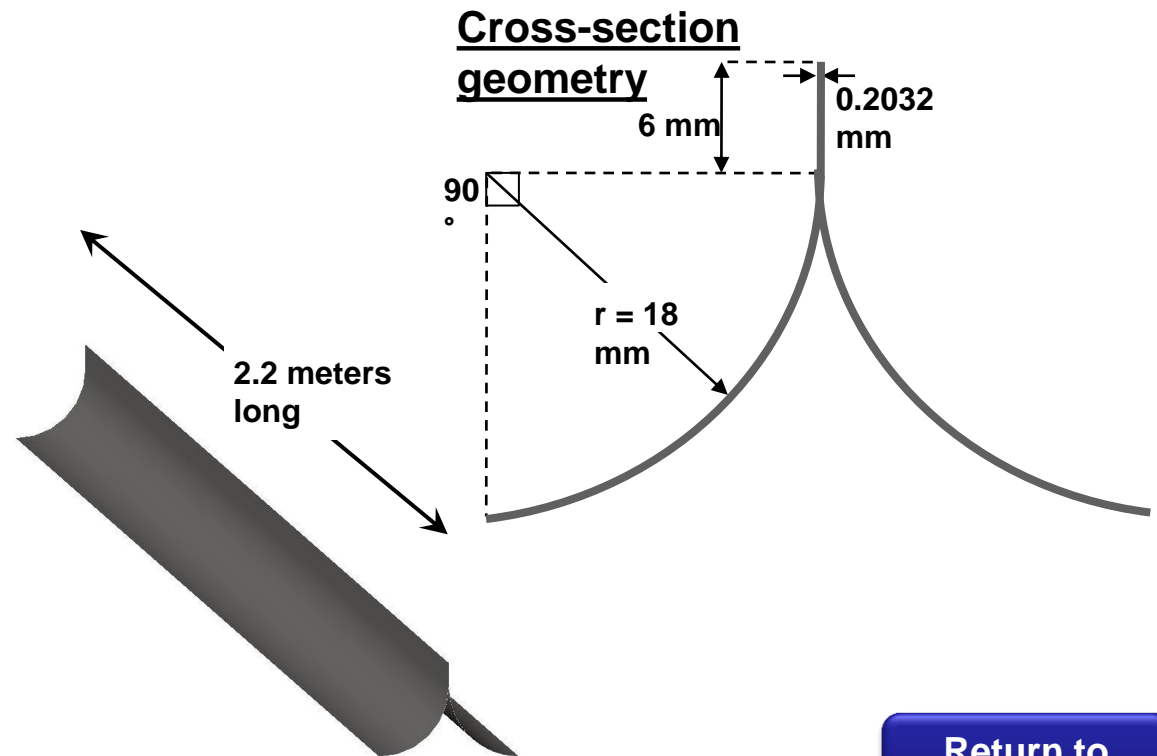

Next

Return to
Index

Material Type

- Elgiloy (stainless steel)
- Composite (NeXolve)




Next

Return to
Index

Deployment Method

- Self deploy (strain energy)

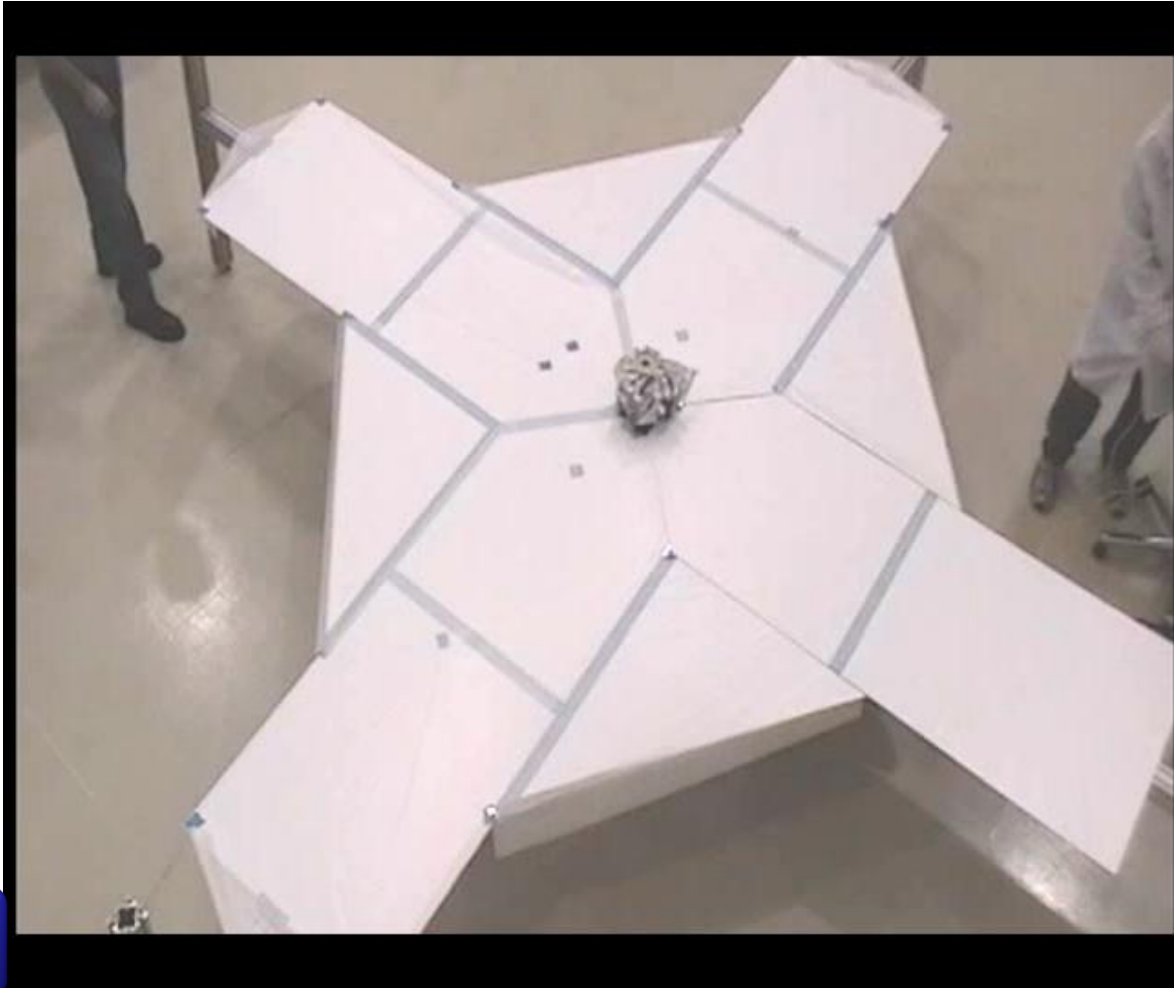

Next

Return to
Index

Issues & Comments

- Mass efficiency

[Next](#)

[Return to
Index](#)

References

AFRL-Jeremy Banik

Alhorn, D., et al, "NanoSail-D: The Small Satellite that Could!", 25th Annual Small Satellite Conference, August 8-11, 2011, Logan, Utah.

Grant, Thomas, M., "Prototype Development and Dynamic Characterization of Deployable Cubesat Booms," Thesis, Department of the Air Force Air University, March 2010, Wright-Patterson Air Force Base, Ohio,

Websites:

http://www.nasa.gov/mission_pages/smallsats/nanosaild.html

<http://www.dtic.mil/cgi-bin/GetTRDoc?AD=ADA517408>

Next

Return to
Index



TubeMast

[Next](#)

[Return to
Index](#)

TubeMast

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
TubeMast	5	0.1	14.1	n/a	2000

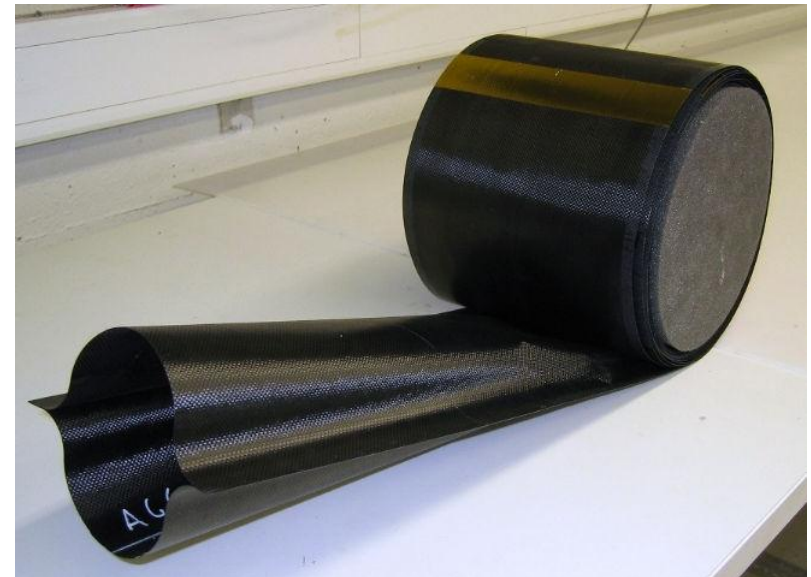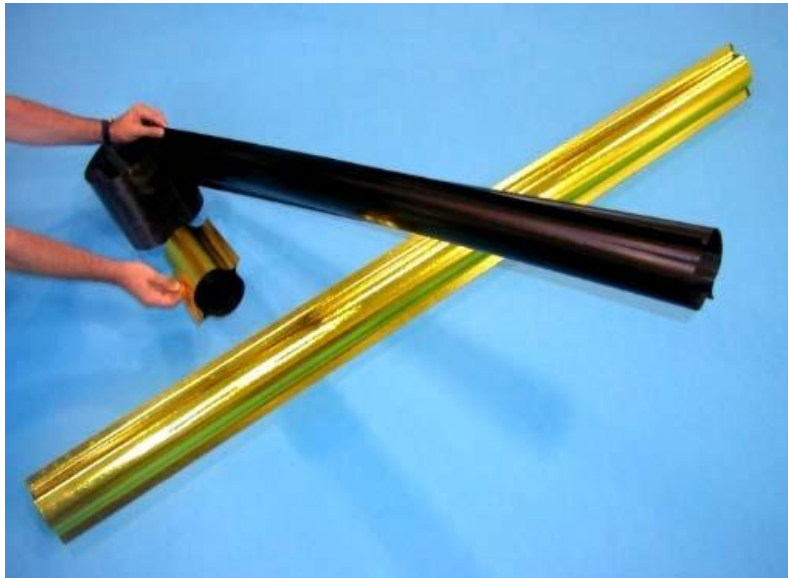

[Next](#)

[Return to
Index](#)

TubeMast

Material Type

- Carbon Fiber Reinforced Plastic (Composite)



[Next](#)

[Return to Index](#)

TubeMast

Deployment Method

- Reeled out
- [Click here for movie](#)

TubeMast Deployed



Sail Fully Deployed



Sail Deployment Module
60cm x 60cm x 60cm – 35kg

Next

Return to
Index

References

Institute of Structural Mechanics, German Aerospace Center

Leipold, M. Runge, H., Sickinger, C., "Large SAR Membrane Antennas with Lightweight Deployable Booms," 28th ESA Antenna Workshop on Space Antenna Systems and Technologies, ESA/ESTEC, May 31-June 03, 2005

Sickinger, C., Breitbach, E., "Ultra-Lightweight Deployable Space Structures," Thesis, Institute of Structural Mechanics, German Aerospace Center, 4th International Conference on Thin-Walled Structures, Loughborough, England, June 22-24, 2004.

Websites:

http://www.dlr.de/fa/en/desktopdefault.aspx/tabid-1322/1831_read-3439/

http://www.dlr.de/fa/en/Portaldata/17/Resources/dokumente/publikationen/2005/11_leipold.pdf

http://www.dlr.de/fa/portaldata/17/resources/dokumente/publikationen/2004/25_sickinger.pdf<http://www.dtic.mil/cgi-bin/GetTRDoc?AD=ADA517408>

ECHO 1 - Sphere

Inflatable Technology

Next

**Return to
Index**

ECHO 1 - Sphere

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
ECHO 1 - sphere	9	n/a	n/a	30	1960



[Next](#)

[Return to Index](#)

ECHO 1 - Sphere

Material

- Mylar 12um thick, with 2000A of vapor-deposited aluminum



[Next](#)

[Return to
Index](#)

ECHO 1 - Sphere

Deployment Method

- Gas pressure

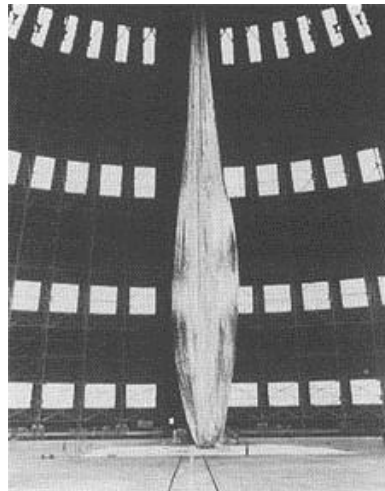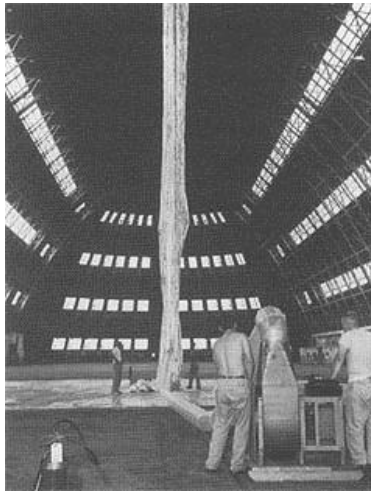

[Next](#)

[Return to
Index](#)

ECHO 2 - Sphere


Inflatable Technology

Next

**Return to
Index**

ECHO 2 - Sphere

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
ECHO 2 - sphere	9		41.8		1964

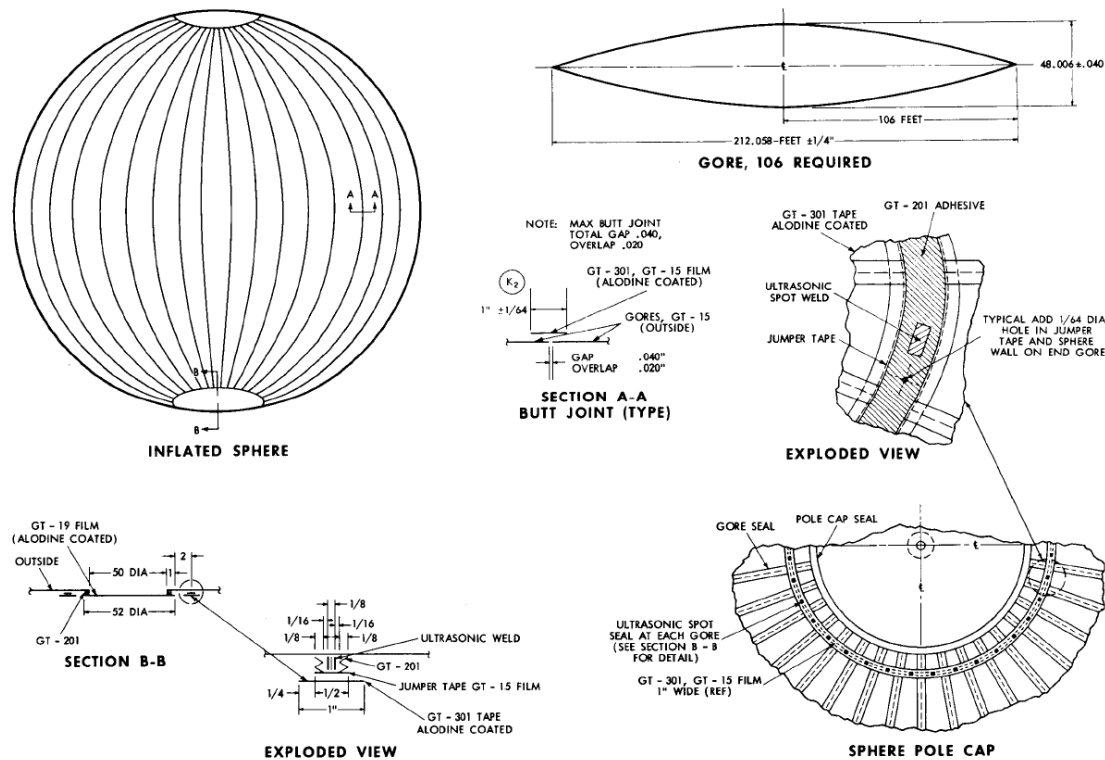


Next

Return to
Index

Figure 3-37. Electrical Continuity Jumper Strip and Pole Cap Installation

ECHO 2 - Sphere

- **Material**
 - Aluminum

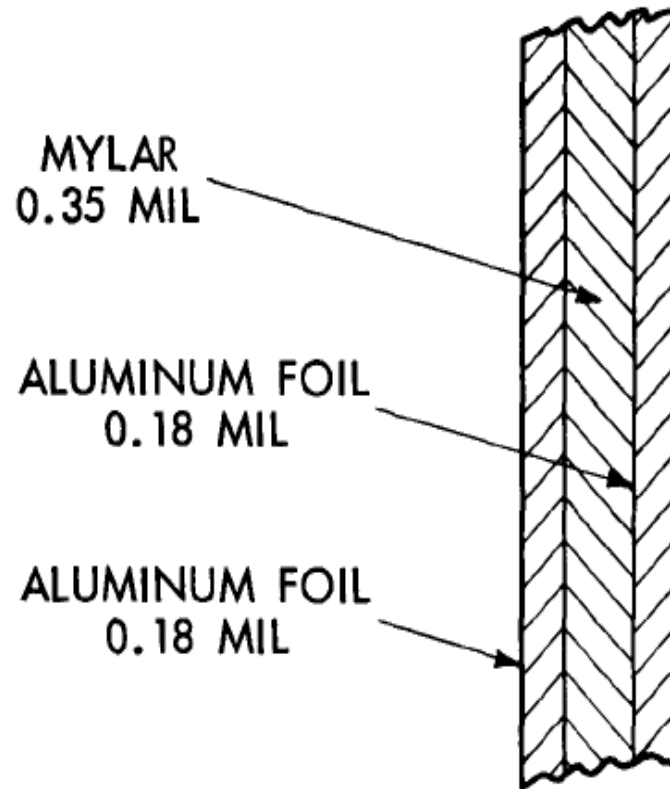

Next

Return to
Index

ECHO 2 - Sphere

- **Deployment Method**
 - Material stressed beyond yield

Next

Return to
Index

Inflatable Torus Solar Array Technology (ITSAT)


Inflatable Technology

Next

**Return to
Index**

ITSAT

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
ITSAT	5+		3.64 X 1.1		1993

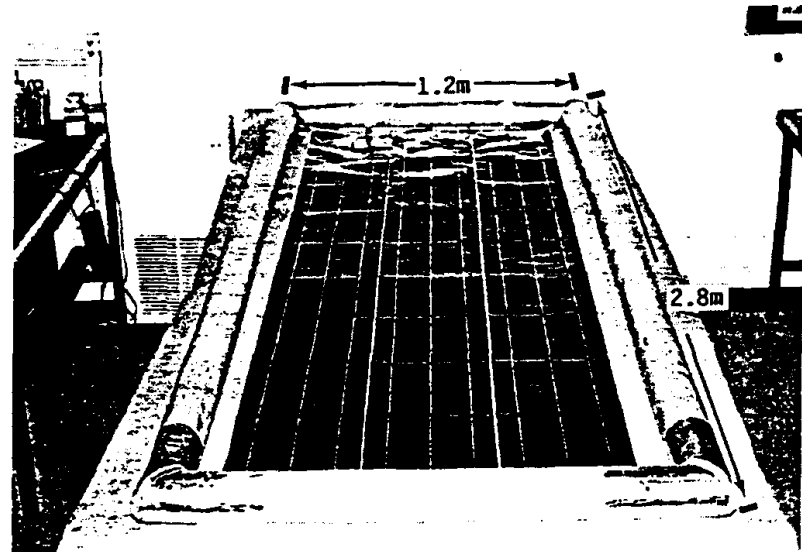

Prototype unit

Next

Return to
Index

Material

- The laminate is aluminum foil sandwiched between two layers of thin plastic. The plastic film is necessary to hold the pressure when inflating by increasing the tear resistance; otherwise the soft foldable aluminum would tear very easily, allowing large leak paths.

[Next](#)

[Return to
Index](#)

Deployment Method

- Sub Tg rigidization

[Next](#)

[Return to
Index](#)

Issues & Comments

- Phase I was a feasibility study of point designs for low Earth orbit (LEO), geosynchronous Earth orbit (GEO), and Molniya orbits with array sizes from 100 W to several thousand watts.' A prototype system was built and this phase was completed in October of 1991. Phase II revised the design of Phase I, generated detailed drawings, and retested the components, producing a protoflight unit. This phase ended with a successful deployment at a temperature of -90°Y in the Naval Research Laboratory's (NRL) 9 meter vacuum chamber, and subsequent dynamics testing and thermal cycling in the deployed state. Phase II was completed in January of 1994.

[Next](#)

[Return to
Index](#)

References

- Lightweight Inflatable Solar Array, Patrick K. Malone and Geoffrey T. Williams, JOURNAL OF PROPULSION AND POWER, Vol. 12. No. 5, September-October 1996
- Inflatable Torus Solar Array Technology Program - Phase 1 Final Report, Gordon Veal, LTR-91-GV-022, L'Garde, Inc., December 1991

[Next](#)

[Return to
Index](#)

Pathfinder Impact Attenuation System

Mars Pathfinder

Next

**Return to
Index**

Mars Pathfinder

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Years of Most Recent Demo
Pathfinder Impact Attenuation System - Mars Pathfinder	9		Six 1.8 m diameter		1997



Spherical lobes
in a "billiard rack"
arrangement

[Next](#)

[Return to
Index](#)

Airbag Subsystem and Lander

Mars Pathfinder

Material

- The airbag bladder material selected was a silicone coated Vectran fabric. A coating of Dow LT50 low temperature silicone rubber was selected from several candidates. The Pathfinder abrasion layers were an uncoated Vectran fabric. The Bladder Layer Components weighed 41 kg and the Abrasion Layer Components weighed 38 kg

[Next](#)

[Return to
Index](#)

Mars Pathfinder

Deployment Method

- Gas pressure
- The 3.25 kg gas generator assembly is housed in a double-cone shaped titanium shell. The unit burned its propellant in two stages: the main grain burned for 1.85s at a high rate for airbag inflation, and the sustain grain burned for 20s at a lower rate for gas make-up during the landing. The gas passed through a coolant chamber before discharge, where pellets of a proprietary propellant endothermally evolve additional cooler gas.

[Next](#)

[Return to
Index](#)

Mars Pathfinder

References

- DEVELOPMENT AND EVALUATION OF THE MARS PATHFINDER INFLATABLE AIRBAG LANDING SYSTEM, D. Cadogan, C. Sandy, M. Grahne, IAF-98-I.6.02

[Next](#)

[Return to
Index](#)

Champollion Solar Array


New Millinium Program ST-4

Next

**Return to
Index**

Champollion Solar Array

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
Champollion Solar Array	5		14.65 X 3		1999

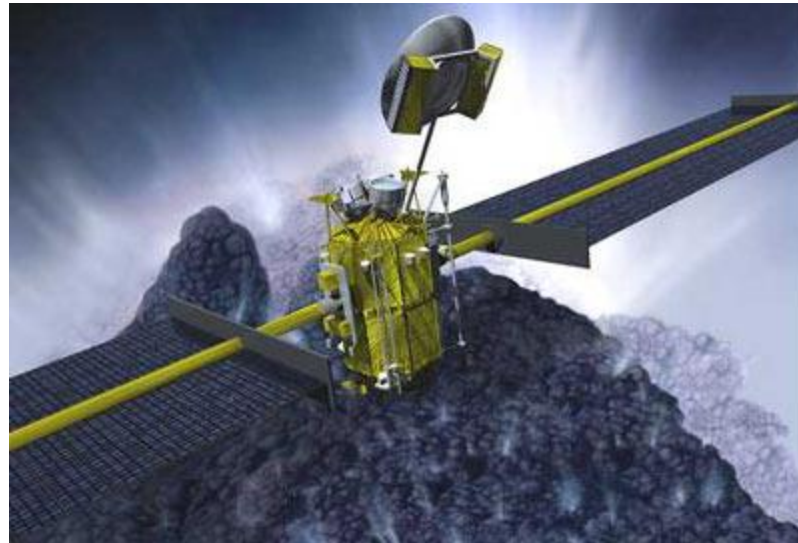

Champollion [NASA]

[Next](#)

[Return to Index](#)

Champollion Solar Array

Deployment Method

- The thermal heating method will be utilized for the flight experiment. The purpose of the inflatable beam is to provide a deployment mechanism and support structure for the solar array.
- A compressed gas system is currently baselined for the ST4 inflatable solar array inflation system.

[Next](#)

[Return to
Index](#)

Champollion Solar Array

Issues & Comments

- Lightweight, low-volume flexible blanket array
- Developed in support of New Millennium Program ST4 comet rendezvous mission
- Inflatable Solar Array Experiment (ISAE) planned for technology demonstration on Shuttle
- ILC Dover / AEC-ABLE / L'Garde / JPL / USAF Team
- 5 kW flexible blanket array
- Inflatable, rigidizable beam provides structure
- Rigidization method is heated thermoset epoxy
- Controlled deployment (wire brake roll-up)
- Array size : 15m x 3m, split blanket configuration
- 102W/Kg with 15% mass margin

[Next](#)

[Return to
Index](#)

Champollion Solar Array

References

Inflatable Solar Arrays: Revolutionary Technology?, Mark S. Grahne, David P. Cadogan, 1999-01-2551, Society of Automotive Engineers, Inc.

[Next](#)

[Return to
Index](#)

Optical Calibration Sphere


(OCS)

Next

**Return to
Index**

OCS

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
OCS	9		4	30	2000

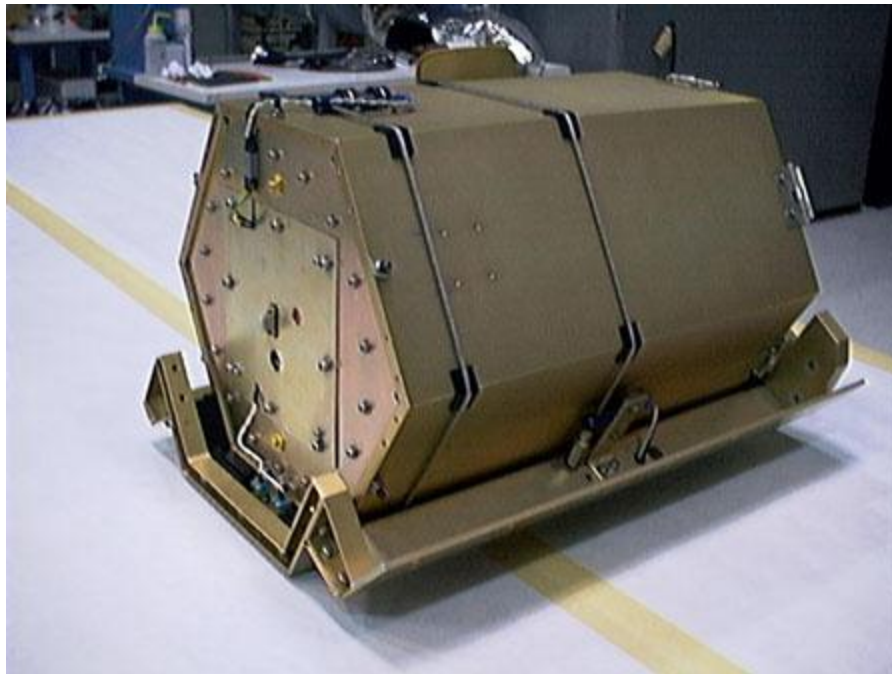

[Next](#)

The OCS and its ejection cradle.

[Return to Index](#)

Material

- Kapton / aluminum balloon

[Next](#)

[Return to
Index](#)

Deployment Method



Sphere slightly larger than OCS

[Next](#)

[Return to
Index](#)

Issues & Comments

- OCSE (Optical Calibration Sphere Experiment) or IOSS (Inflatable Optical Sphere System), a 3.5m diameter inflatable sphere built by L'Garde Inc. for calibrating the lasers at the AFRL Starfire Optical Range.
- The 0.48m long 0.41m diameter OCSE canister was ejected from the JAWSAT stack; 42 seconds later, with the canister clear of the other payloads, the canister door opened and 10 seconds after that inflation of the sphere began. The canister remains attached to the inflated sphere. Once inflated, the sphere's material becomes rigidized.

References

- <http://www.astronautix.com/craft/ocse.htm>

Next

Return to
Index

Cibola Experiment

Inflatable Boom with Radio Antenna

Next


**Return to
Index**

Cibola Experiment

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
Cibola Experiment	7	n/a	2.4	n/a	2007



The Cibola Flight Experiment Satellite



CAD model (l) and hardware (r)

Weights 1.8 Kg, with a packaged volume of 0.002 m³
(0.09 ft³)

Each antenna (3) deploys to a final length of 2.2 m
(7.3 ft.)

[Next](#)

[Return to Index](#)

Cibola Experiment

Material

- Kevlar fabric with sub-Tg resin impregnated fibers.

[Next](#)

[Return to
Index](#)

Cibola Experiment

Deployment Method

- Cooling below glass transition
- Utilizes conical, inflation-deployed mast.
- Deployed successfully in vacuum after proto-flight environmental tests, and three previous deployments in ambient and thermal/vacuum environments

[Next](#)

[Return to
Index](#)

Cibola Experiment

Issue & Comments

- The antenna mast design was based upon the same inflatable mast structure that L'Garde designed and demonstrated on the ground for a NASA solar sail demonstration. Each antenna mast is comprised of a Kevlar fabric impregnated with a temperature sensitive, rigidizable resin that is deployed by inflation. Each antenna assembly weighed 2.1 kg and was approximately 16 x 16 x 6 cm in dimension when stowed. Inflated, each antenna was to be 2.4m in length. Unfortunately, only one of the three antenna masts inflated correctly, potentially due to the RF cable bundle being too tightly constrained interior to the antenna masts. The other two masts inflated about half way before they stalled and vented, leaving the antenna elements in a non-optimal orientation

[Next](#)

[Return to
Index](#)

Cibola Experiment

References

- The Cibola Flight Experiment, Michael Caffrey et. al., 23rd Annual Small Satellite Conference, Logan, UT, USA, 8/10/2009

[Next](#)

[Return to
Index](#)

Inflatable Antenna Experiment



(IAE)

Next

**Return to
Index**

IAE

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
IAE	8		14x28		1996

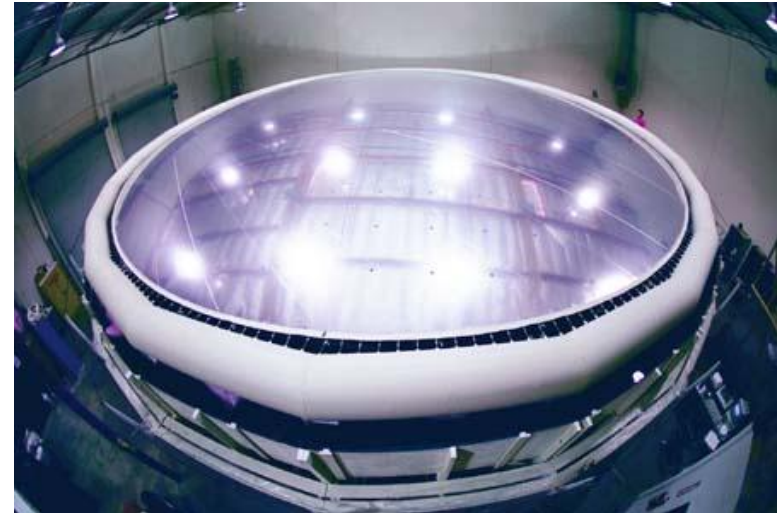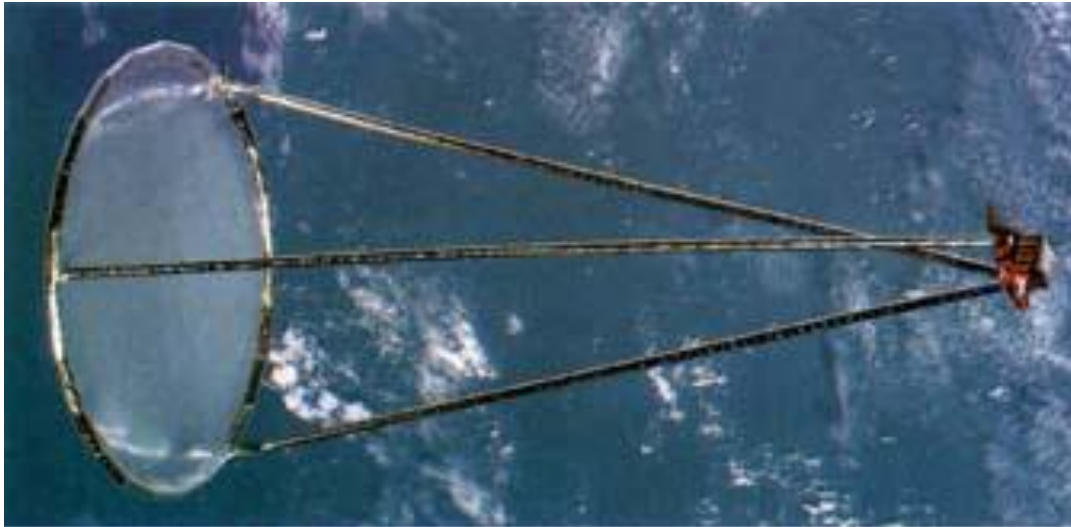

[Return to Index](#)

Material

- Canopy - one-quarter-mil clear mylar
- 14-meter-diameter reflector was based on using 62 individual one-quarter-mil aluminized mylar gores
- Torus - neoprene-coated kevlar
- Struts - same neoprene-coated kevlar material as used on the torus. The diameter and resulting bending stiffness are based on a requirement for a minimum natural frequency to accommodate the orbital stability needed for the experiment. The minimum diameter required was 35.6 cm.

[Next](#)

[Return to
Index](#)

Deployment Method

- Gas pressure
- High-pressure nitrogen gas



[Next](#)

[Return to
Index](#)

Issues & Comments

- The antenna configuration is an off-axis parabolic reflector structure consisting of (a) a 14-meter-diameter, multiple-gore reflector structure and a transparent canopy (which is a mirror shape of the reflector) to maintain gas pressure on orbit, (b) a torus structure that supports the reflector/canopy circumferentially, and (c) three 28 meter-long struts that interface the torus structure with the canister which is located at the center of curvature of the reflector to accommodate operation of the surface measurement system.
- The inflatable structure deployment sequence was not nominal due to an unexpected amount of residual air in the stowed structure and a significant amount of strain energy release from the torus structure. This resulted in early deployment of the reflector structure such that the ejector plate was not able to propel it away from the canister. Consequently, when the struts deployed, they were not fully extended resulting in more strut deflection than anticipated. This also caused sequential rather than simultaneous strut inflation. However, as they completed deployment, the reflector was pushed away from the canister and deployment was completed.
- The lenticular structure failed to completely deploy for unknown reasons at this time. Initially, it appears that the residual air in the stowed structure caused partial deployment, but subsequently that air escaped from the ascent vent holes and the lenticular structure went almost completely flat.

References

- Preliminary Mission Report Spartan 207/Inflatable Antenna Experiment Flown on STS-77, Spartan Project Code 740.1, NASA Goddard Space Flight Center
- DEVELOPMENT OF FLIGHT HARDWARE FOR A LARGE, INFLATABLE-DEPLOYABLE ANTENNA EXPERIMENT, R. E. Freeland, G. D. Bilyeu, G. R. Veal, IAF-95-1 S.O. 1

[Next](#)

[Return to
Index](#)

20 Meter L'Garde Ground System Demonstration

Solar Sail

Next

**Return to
Index**

L'Garde Solar Sail Demo

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
20 meter L'Garde Ground System Demonstration	5+		20 x 20	150 x 150	2006



Deployed 20m Sail System with Vane

[Next](#)

[Return to Index](#)

L'Garde Solar Sail Demo


Material

- Sail - 2 micron commercial mylar and kevlar ripstop
- Boom - kapton bladder with kevlar reinforcement and sub Tg impregnated resin
- Beam - boom plus graphite spreader bars and kevlar longerons and battens

[Next](#)

[Return to
Index](#)

L'Garde Solar Sail Demo

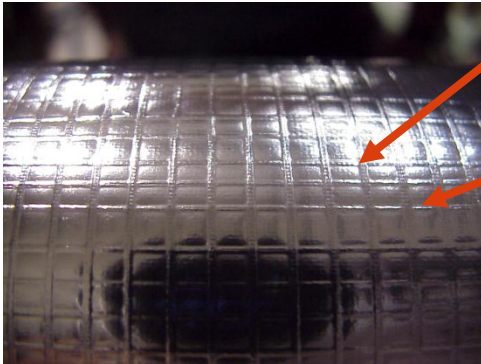

Boom - Kapton bladder with Kevlar reinforcement and sub Tg impregnated resin

Load bearing longitudinal uni-directional fibers


- Fibers impregnated with sub-Tg resin (rigid below -20°C)
- 0.48 AU design requires greater fiber density to withstand loads from the increased solar flux

Spiral wrap

- Stabilizes longitudinal fibers
- Allows over-pressurization for deployment anomalies


Bonded Kapton bladder and Mylar

- Encapsulation "skin" carries shear
- Aircraft fuselage like structure

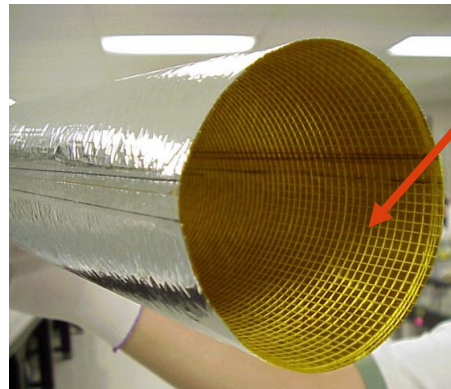


Beam Structure - boom plus graphite spreader bars and kevlar longerons and battens

- Sail structure is stressed for solar loading in one direction for mass efficiency
- Truss system comprised of mostly tension elements, minimal rigid components
- Highly mass efficient, $\sim 36\text{g/m}$ linear density

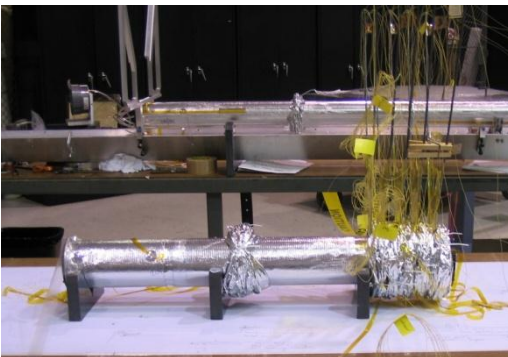

Stowed 7 m beam ($\sim .5\text{ m}$)

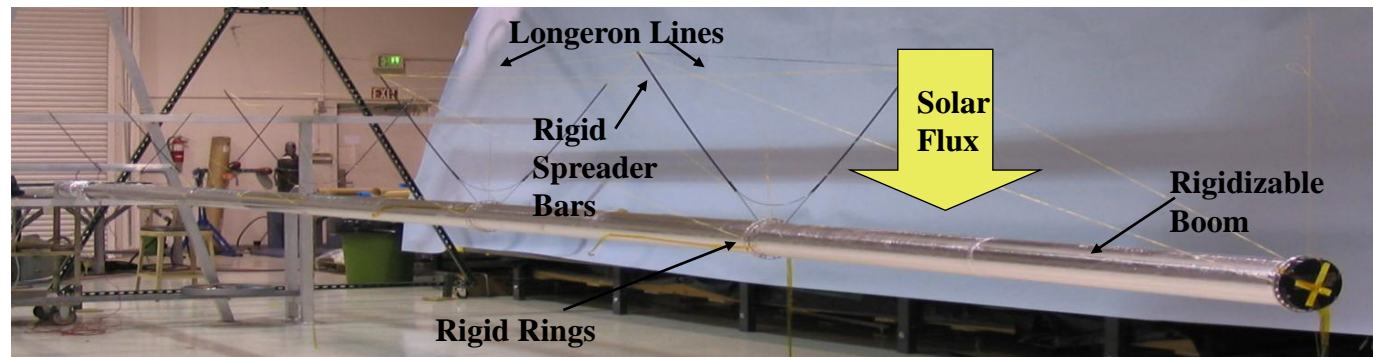

Deployed 7 m beam

[Return to Index](#)

L'Garde Solar Sail Demo

Deployment Method

- Sub – Tg rigidization
- Nitrogen gas until rigidization

[Next](#)

[Return to
Index](#)

L'Garde Solar Sail Demo

Issues & Comments

- No deployment modeling or asymmetric deployment results have been presented.
- Asymmetric deployment issues during vacuum testing.
- Sail material - an issue with coated mylar in a VUV environment. Material loses strength in 3 years and disintegrates in a 6 years.
- No testing has been done on seams, booms, beams, targets, insulation, repairs or elements
- Process and procedures are not well documented.
- Reliability and repeatability of the manufacturing and assembly processes are an issue.
 - Deployed one boom 5 times and the system 2 times
- Process are highly labor intensive and personnel training is critical. (i.e..Beam assembly persons cannot reliably perform sail assembly functions)
 - Inspection of line management is critical but difficult and labor intensive. The risk probability of misrouting lines is great and the problem can cause damage to the sail, stripped net, insulation, cats' cradle and the tip. Greater than 500 inspection points for a 20m system
- Inflation system design and especially the leaking of the tip mandrels is a potential life issue.

L'Garde Solar Sail Demo

References

IN-SPACE PROPULSION SOLAR SAIL EXECUTIVE SUMMARY, L'Garde, Inc, NASA
MSFC NAS8-03046

VACUUM DEPLOYMENT AND TESTING OF A 20M SOLAR SAIL SYSTEM, D.
Lichodziejewski, B. Derbès, D. Sleight, T. Mann, AIAA 2006-1705, 47th
AIAA/ASME/ASCE/AHS/ASC Structures, Structural Dynamics, and Materials
Conference, 2006

[Next](#)

[Return to
Index](#)

Transhab

Inflatable Habitation Module

Next

**Return to
Index**

Transhab

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
Transhab	9*	n/a	23 ft tall x 27 ft diameter	n/a	1998



[Next](#)



[Return to Index](#)

*design implemented by Bigelow Aerospace on orbit as Genesis 1 and 2

Transhab

Material

- Inflatable shell is 16 inches thick and is composed of over 60 layers arranged as five major subassemblies: (1) is the innermost layer and acts as a protective layer for the tripely redundant bladder layers (2). A woven restraint layer supports the bladder and is designed to withstand 4 atmospheres of internal pressure (3). The restraint and bladder layers are protected from micrometeoroid impacts by the debris protection system which consist of multiple layers of ceramic fabric separated by open cell foam and a Kevlar fabric debris catcher (4). The outer most layers consist of multilayer insulation (MU) and atomic oxygen (AO) protective layers (5)

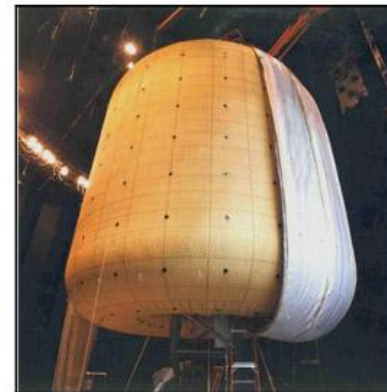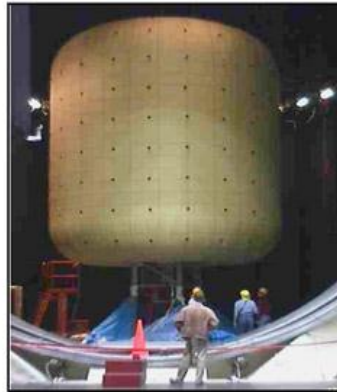

[Next](#)

[Return to
Index](#)

Deployment Method

- Gas pressure

[Next](#)

[Return to
Index](#)

Transhab

- **References**

- <http://www.ilcdover.com/Transhab/>
- Deployment Testing of an Expandable Lunar Habitat, Jon Hinkle and John K.H. Lin, Judith Watson
- TRANSHAB: NASA's LARGE-SCALE INFLATABLE SPACECRAFT
- Horacio de la Fuente, Jasen L. Raboin, Gary R. Spexarth, Gerard D. Valle, AIAA 2000-1822, 2000 AIAA Space Inflatables Forum; Structures, Structural Dynamics, and Materials Conference

Next

Return to
Index

Vega 1 & 2 Balloon Probe


Venus Balloon Probe

[Next](#)

[Return to
Index](#)

Vega 1 & 2

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
Vega 1 & 2 Balloon – Venus Balloon Probe	9	n/a	3.54	n/a	1985

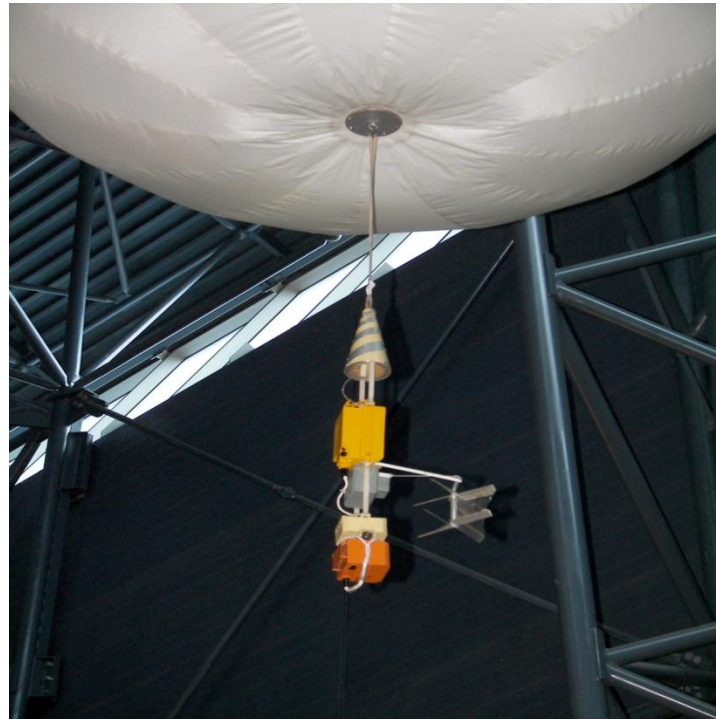

Weight: 12.5 kg for balloon

[Next](#)

[Return to Index](#)

Vega 1 & 2

Material

- Teflon cloth matrix coated with teflon film

Next

Return to
Index

Vega 1 & 2

Deployment Method

- Gas pressure – inflated to 30 mbar over pressure
- 2 kg of helium

[Next](#)

[Return to
Index](#)

Vega 1 & 2

Issues & Comments

Flew in the atmosphere of Venus for a prolonged period of time

[Next](#)

[Return to
Index](#)

Vega 1 & 2

References

- Title: The Vega balloons - A tool for studying atmosphere dynamics on Venus
 - Authors: Kremnev, R. S., Selivanov, A. S., Linkin, V. M., Lipatov, A. N., Tarnoruder, I. I., Puchkov, V. I., ,
- Journal: (Pis'ma v Astronomicheskii Zhurnal, vol. 12, Jan. 1986, p. 19-24) Soviet Astronomy Letters (ISSN 0360-0327), vol. 12, Jan.-Feb. 1986, p. 7-9.
Translation.

[Next](#)

[Return to
Index](#)

Synthetic Aperture Radar


(SAR)

Next

**Return to
Index**

SAR

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
Synthetic Aperature Radar (SAR)	n/a	n/a	n/a	n/a	n/a

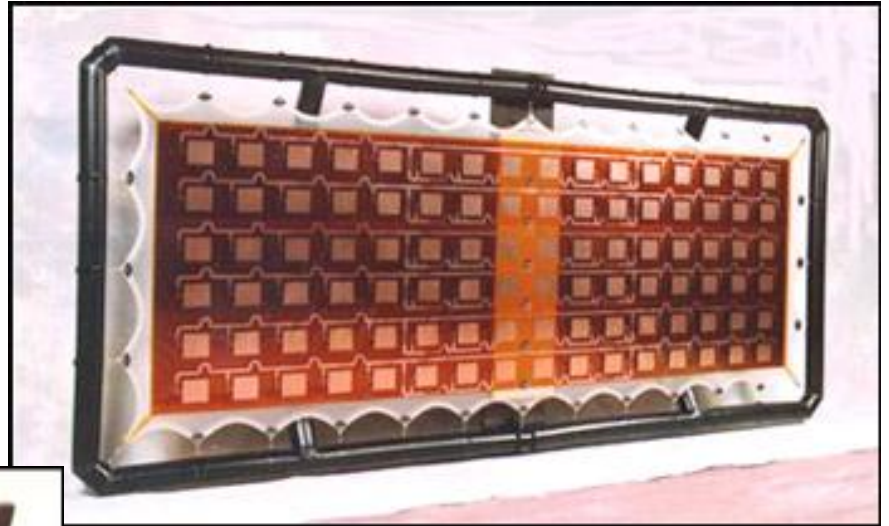

[Return to Index](#)

Material

- The inflated tube frame has a diameter of 13 cm and is made of 10-mil thick urethane coated Kevlar material

[Next](#)

[Return to
Index](#)

Deployment Method

- The tube structure has imbedded steel coil spring to produce a smooth and controlled deployment. The inflatable bottle, made of lightweight composite material, is housed inside the central support box and has a regulator to inflate and maintain tube pressure at 5 psi

[Next](#)

[Return to
Index](#)

Issues & Comments

- ILC worked in conjunction with NASA JPL to develop the 1.25 GHz L-Band SAR technology demonstrator with dual linear polarization, 80 MHz Bandwidth and electronic beam scanning for space application. The goal of the program was to determine if a deployable large aperture SAR could be produced with an aerial density of $<2\text{Kg/M}^2$. ILC designed a 1/3 scale deployable support structure, assembled the membrane layers and conducted system testing.
- The key to achieving the goals of the program was in creating a stable deployable support structure which properly spaced and tensioned the radiating patch, microstrip transmission line, and ground plane membrane layers with high accuracy. Deployment was controlled with embedded mechanisms in the inflatable structure to ensure protection of the membranes from the packed to deployed state.

References

- <http://www.ilcdover.com/SAR/>

Next

Return to
Index

In Space Inflatable Sunshield Experiment

(ISIS)

Next

**Return to
Index**

ISIS


Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
ISIS	5-6	n/a	4.5 x 10.4	n/a	n/a



[Next](#)

[Return to Index](#)

Deployment Method

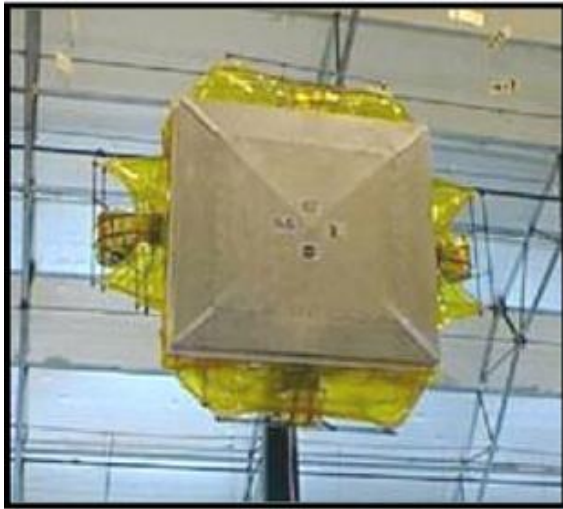

[Next](#)

[Return to Index](#)

References

- Next Generation Space Telescope Inflatable Sunshield Development, Charles R. Sandy, 2000 IEEE
- Sunshield Technology and Flight Experiment for the Next Generation Space Telescope, Linda Pacini, Michael Lou, John Johnston, Sebatien Lienard, SPIE 2000

[Next](#)

[Return to
Index](#)

Genesis 1

[Next](#)

[Return to
Index](#)

Genesis 1

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
Genesis 1	9		4.4 x 2.54 4.4 x 1.6 stowed		2006



[Next](#)

Genesis 1 Exterior and Interior

[Return to Index](#)

Genesis 1

Deployment Method

- Gas pressure

[Next](#)

[Return to
Index](#)

Genesis 1

Issues & Comments

- Bigelow originally licensed the multi-layer, expandable space module technology from NASA after Congress canceled the ISS TransHab project following delays and budget constraints in the late 1990s. Bigelow continued to develop the technology for a decade, redesigning the module fabric layers—including adding proprietary extensions of Vectran shield fabric, "a double-strength variant of Kevlar" -- and developing a family of uncrewed and crewed expandable spacecraft in a variety of sizes. Bigelow invested US\$75 million in proprietary extensions to the NASA technology by mid-2006, and \$180 million into the technology by 2010.

[Next](#)

[Return to
Index](#)

Genesis 1

References

- Wikipedia

[Next](#)

[Return to
Index](#)

Genesis 2

[Next](#)

[Return to
Index](#)

Genesis 2

Technology	TRL	Specific Mass (kg/m)	Size Demonstrated (m)	Size Limit (m)	Year of Most Recent Demo
Genesis 2	9		4.4 x 2.54 4.4 x 1.6 stowed		2007



Next

Genesis 2 On Orbit and Mockup

Return to
Index

Genesis 2

Deployment Method

- Gas pressure

[Next](#)

[Return to
Index](#)